

ROLL Flex TOP


18

R1

QUICK OVERVIEW: STRENGTHS

The perfect connection

- Mouldable three-dimensional pleated strip
- Completely adhesive bottom side
- Perfect for sealing every step and interruption on the pitched roof
- Watertight and resistant to UV rays
- Aluminum version available in three different lengths: 30, 45 e 60 cm (unique on the market)

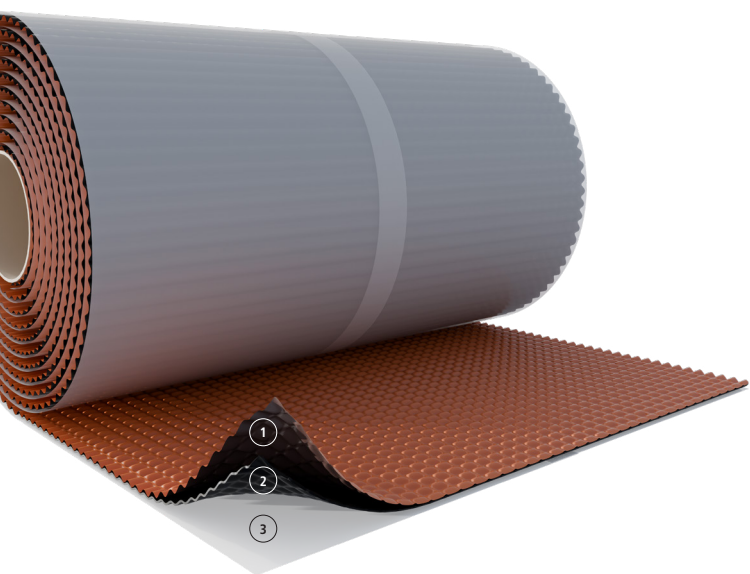

Composition:

- 1 Aluminium or lead or copper
- 2 Butylic glue
- 3 Silicon liner

Features:



Technical data sheet

Material		alu or lead or copper / butyl
Copper stripe		0,10 mm
Aluminium stripe		0,15 mm
Lead stripe		0,20 mm
Butylic glue thickness		1,5 mm
Roll length		5,00 m
UV rays stability		stable*
Ageing resistance		resistant
Temperature resistance		-30°C / +90°C
Processing temperature		+5°C / +40°C
Alu development		1,30 %
Storage		dry, protected from UV rays, max. +30°C
Packaging		1 pc/box
Pallet		48 boxes

Codes and measures

Version	aluminium			lead	copper
Colours / Measures	300 mm	450 mm	600 mm	300 mm	300 mm
Red-brown	01107301	01107451	01107601	01106301	-
Brown	01107302	01107452	01107602	01106302	-
Black	01107303	-	-	01106303	-
Copper	-	-	-	-	01108305

*with reference to the Central European climate
Riwega Srl is not responsible for negligent and improper use of its products