

UNI Air ROLL



03

R1

QUICK OVERVIEW: STRENGTHS

Excellent price/quality ratio

- Under-ridge roll
- Resistant to water infiltrations and UV rays
- Easily adaptable to every type of roof covering
- Pre-folded Alu edge to increase the mechanical resistance
- Blocks access to birds and rodents under the roof tiles

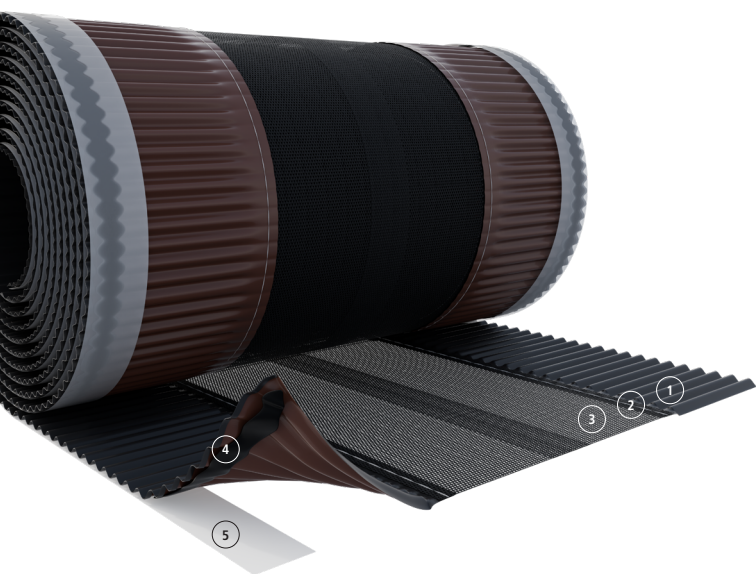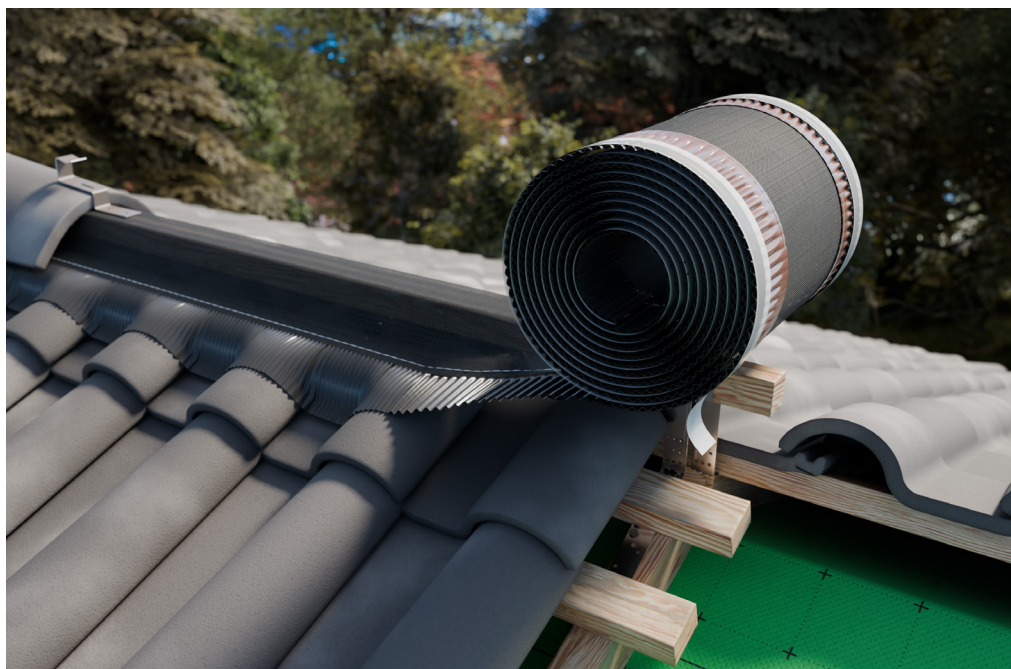

Composition:

- ① Aluminium with prefolded edge
- ② Seam
- ③ PP fabric
- ④ Extruded butylic glue
- ⑤ Silicon liner

Features:



Technical data sheet

Material		alu.PP.alu
Pre-folded edge		YES
Aluminium stripe		0,12 mm
Roll length		5,00 m
Central fabric		UV stabilized PP
Central stripe		NO
Material assembly		glue and seam
Extruded butylic glue		120 g/m
Air flow (each side)	DIN 4108-3	>145 cm ² /m
UV rays stability		stable
Ageing resistance		resistant
Temperature resistance		-30°C / +70°C
Processing temperature		+5°C / +40°C
Alu development		1,35 %
Storage		dry, protected from UV rays, max. +30°C
Packaging		4 pc/box
Pallet		30 boxes

Codes and measures

Colours / Measures	310 mm	370 mm	400 mm
Red-brown	01010300	01010310	01010400
Brown	01010301	01010311	01010401
Black	-	01010313	01010403