


Micro 200 Vario V7

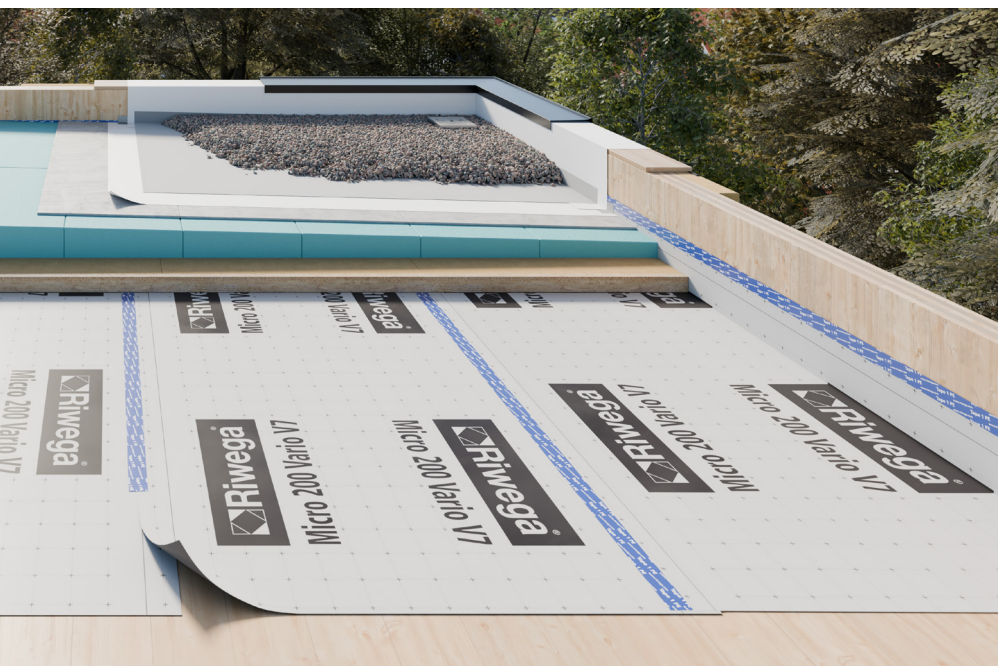

QUICK OVERVIEW: STRENGTHS

The first with variable hygrometry at high grammage

- Vapour control layer with variable hygrometric
- High resistance to tearing and trampling due to heavy grammage
- Easy drying of the bottom side during summer
- Perfect regulation of vapour passage based on temperature and humidity
- Also usable on concrete surfaces

Features:



Classification:



**new
product**



Technical data sheet

Mass per unit area	EN 1849-2	200 g/m ²
Thickness		0,90 mm
S _d value	EN ISO 12572	0,2 - 7 m
Water vapour permeability	EN ISO 12572	~ 100 - 5 g/m ² /24 h
Water column	EN 20811	>80 cm
Water tightness	EN 13984	passed
Tensile strength MD/CD*	EN 12311-1	400 / 350 N/50mm
Elongation MD/CD*	EN 12311-1	40 / 50 %
Tear resistance MD/CD*	EN 12310-1	250 / 280 N
Fire reaction class	EN 13501-1	E
UV stability		3 months
Temperature resistance		-40°C / +80°C

Composition:

- Protective layer in PP ①
- Functional film in PA ②
- Protective layer in PP ③

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m ²)
02030148	-	1,5	50	1500

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products