

Windtop UV Fire A2 50/225


24

R2

QUICK OVERVIEW: STRENGTHS

Fire resistance inside ventilated facade

- Breathable waterproofing membrane for ventilated facades
- Class A2-s1,d0 reaction to fire
- Ideal membrane for waterproof and wind-tight ventilated facades with open joints
- Black color for an optimal aesthetical impact
- UV resistance for joints up to 50 mm

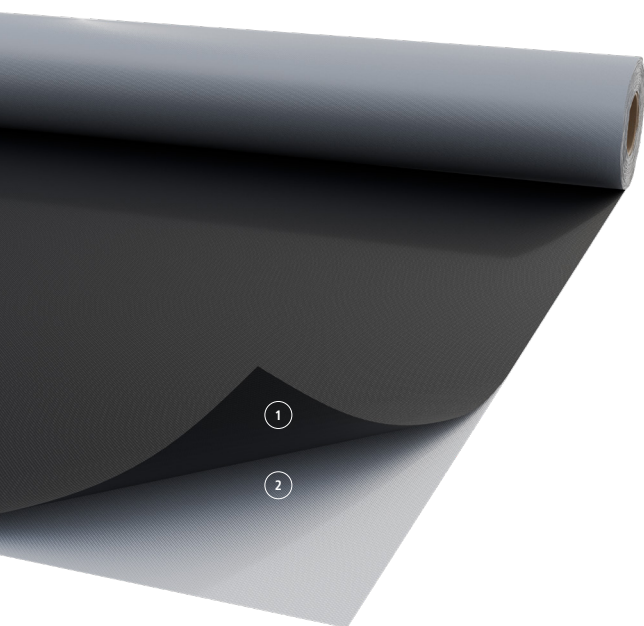

Composition:

- ① Special UV-coating
- ② Fibre glass

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m²)
02010343	-	1,5	50	2700

Features:



Classification:



Technical data sheet

Mass per unit area	EN 1849-2	225 g/m²
Thickness		0,23 mm
S _d value	EN ISO 12572	0,09 m
Water vapour permeability	EN ISO 12572	~ 500 g/m²/24 h
Air permeability	EN 12114	<0,006 m³/(m²h 50Pa)
Resistance to water passage	EN 1928 (Met. A)	W2
Tensile strength MD/CD*	EN 12311-1	4200 / 3100 N/50mm
Elongation MD/CD*	EN 12311-1	6 / 5 %
Tear resistance MD/CD*	EN 12310-1	290 / 390 N
Fire reaction class	EN 13501-1	A2-s1,d0
UV stability	stable (joints up to max. 50 mm - max. 50 %)	
Weathering without final cladding		3 months
Temperature resistance		-40°C / +100°C (for short times max. +180°C)

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products