

Basic ROLL



05

R1

QUICK OVERVIEW: STRENGTHS

The essential one for roof ventilation

- Under-ridge roll
- Resistant to water infiltrations and UV rays
- Easily adaptable to every type of roof covering
- Blocks access to birds and rodents under the roof tiles

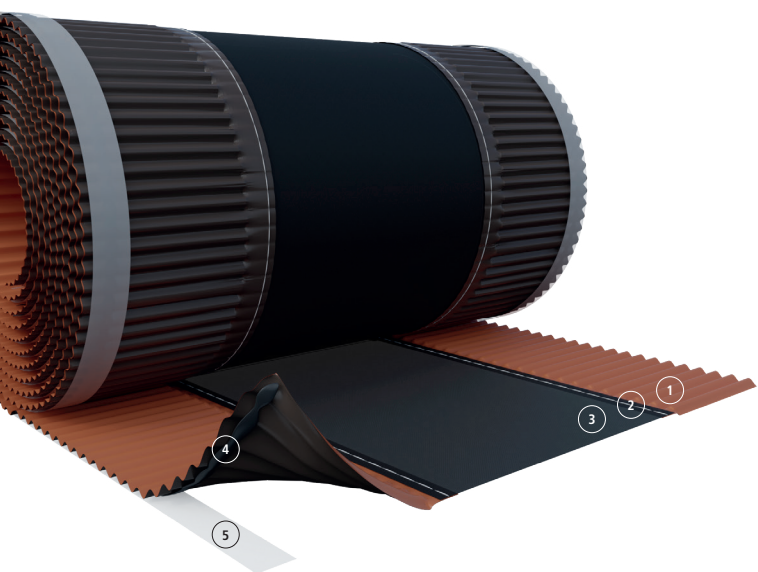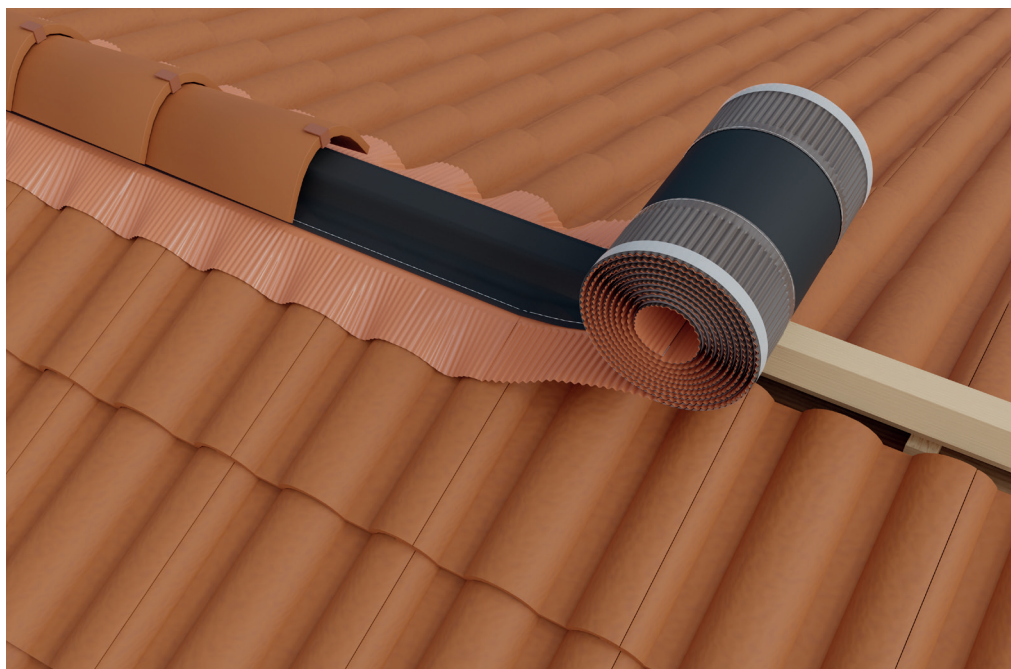

Composition:

- ① Aluminium
- ② Seam
- ③ Multilayer PP fabric
- ④ Extruded butylic glue
- ⑤ Silicon liner

Features:



Technical data sheet

Material		alu.PP.alu
Pre-folded edge		NO
Aluminium stripe		0,12 mm
Roll length		5,00 m
Central fabric		multilayer PP fabric
Central stripe		NO
Material assembly		glue and seam
Extruded butylic glue		80 g/m
Air flow (each side)	DIN 4108-3	>50 cm ² /m
Temperature resistance		-30°C / +70°C
Processing temperature		+5°C / +40°C
Alu development		1,25%
Storage		dry, protected from UV rays, max. +30°C
Packaging		4 pc/box
Pallet		60 boxes

Codes and measures

Colours / Measures	310 mm	370 mm
Red-brown	01010318	01010320
Brown	01010319	01010321