

GAE ST Plus


Airtight sealing protection for wooden elements with self-expanding tape
Riwega | eternitycomfort

Technical data sheet
of: 29/11/2019
Art. 020450061-020450060
Rev.01 of: 18/08/2021

Properties		GAE ST Plus 100	GAE ST Plus 250
Article		020450060	020450061
Measurements		100 mm x 25 m	250 mm x 25 m
Material	Waterproof band	EPDM based synthetic rubber	
	Gasket	Precompressed polyurethane-based sealing tape	
	Adhesive	-	Butyl (2 strips of 20 mm)
Colour		Black (waterproof band) / Gray (gasket)	
UV and ozone stability		Conform (DIN 7864 T1)	
EPDM Thickness		0,8 mm	
Coefficient of vapour passage resistance (μ value)		approx.32000 (DIN EN 1931)	
Tear resistance		≥ 25 kN/m (DIN 53504)	
Tensile strength		$\geq 6,5$ mPa (DIN 53504)	
Elongation at break		≥ 300 % (DIN 53504)	
Reaction to fire		E (DIN 13501 T1)	
Dimensional tolerance		Meets the requirements (DIN 7715 T5 P3)	
Working temperature		+5°C / +35°C	
Operating temperature		-30°C / +100°C	
Package		3 rolls	1 roll
Storage		Cool and dry away from UV rays, max.12 months	
Storage temperature		+1°C / +25°C	

TECHNICAL DRAWING

GAE ST Plus 100

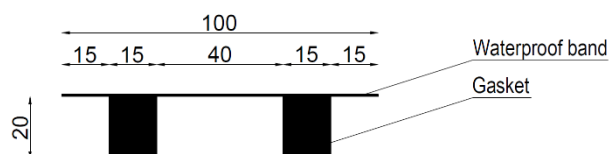

GAE ST Plus 250

