ROLL Flex TOP - Alu

QUICK OVERVIEW: STRENGTHS

The perfect connection in alu

- Mouldable three-dimensional pleated strip
- Completely adhesive bottom side
- Perfect for sealing every step and interruption on the pitched roof
- Three different lengths available: 30, 45 e 60 cm (unique on the market)
- Watertight and resistant to UV rays

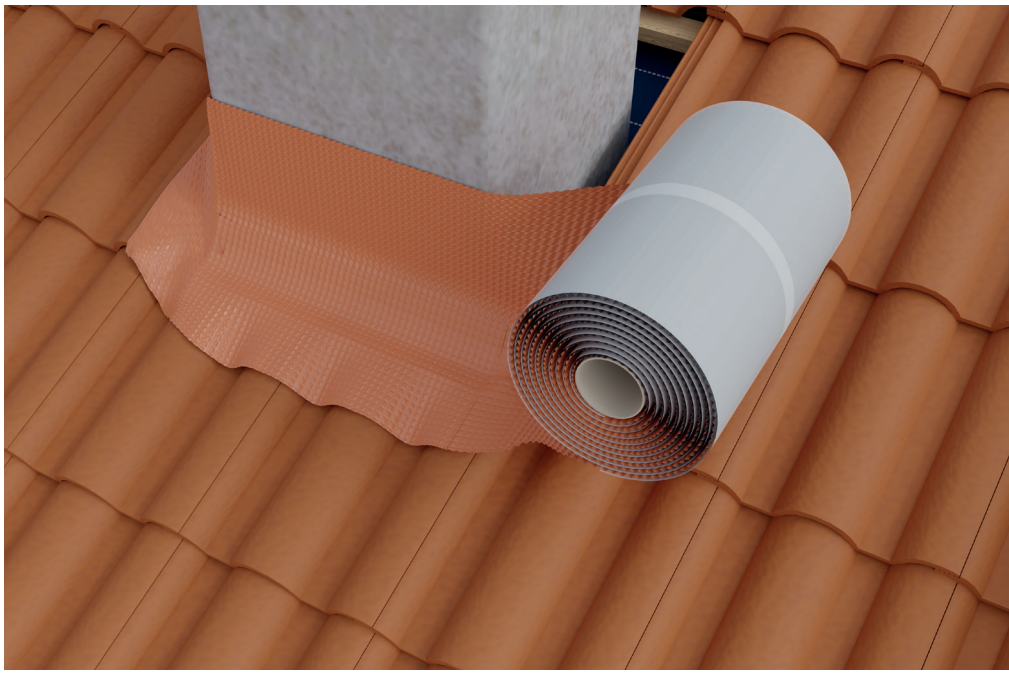

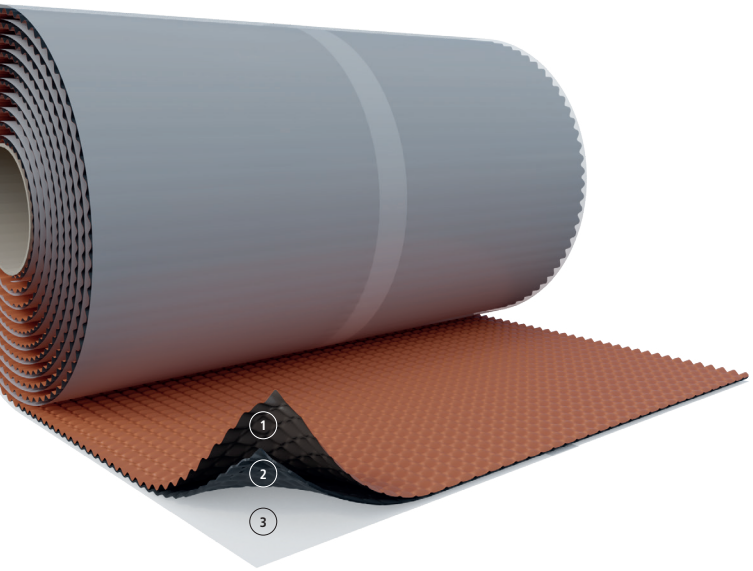

Composition:

1. Aluminium
2. Butylic glue
3. Silicon liner

Features:

Technical data sheet

Material		**aluminium / butyl**
Aluminium stripe		**0,15 mm**
Butylic glue thickness		**1,5 mm**
Roll legth		**5,00 m**
UV rays stability		**stable***
Ageing resistance		**resistant**
Temperature resistance		**-30°C /+90°C**
Processing temperature		**+5°C /+40°C**
Alu development		**1,30%**
Storage		**dry, protected from UV rays, max. +30°C**
Packaging		**1 pc/box**
Pallet		**48 boxes**

Codes and measures

Colours / Measures	300 mm	450 mm	600 mm
Red-brown	01107301	01107451	01107601
Brown	01107302	01107452	01107602
Black	01107303	-	-

*with reference to the Central European climate

Riwega Srl is not responsible for negligent and improper use of its products