



ROLL Flex TOP - Cu

20
R1

QUICK OVERVIEW: STRENGTHS

The perfect connection in copper

- Mouldable three-dimensional pleated strip
- Completely adhesive bottom side
- Perfect for sealing every step and interruption on the pitched roof
- Watertight and resistant to UV rays

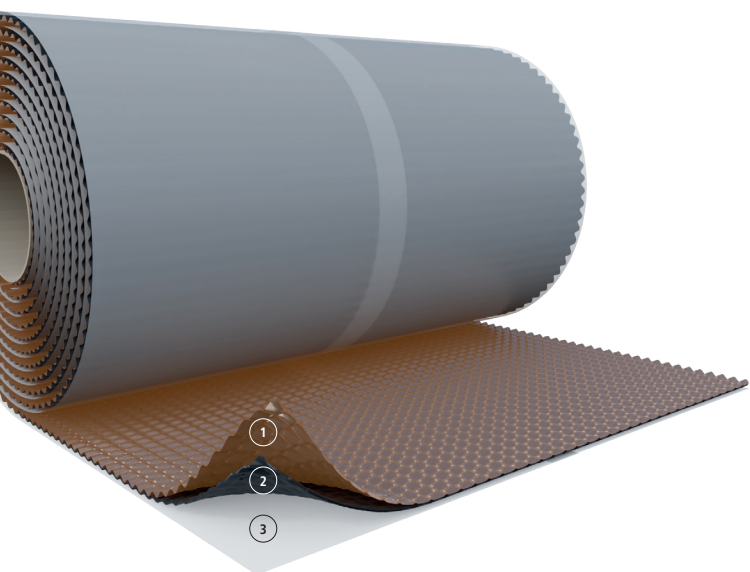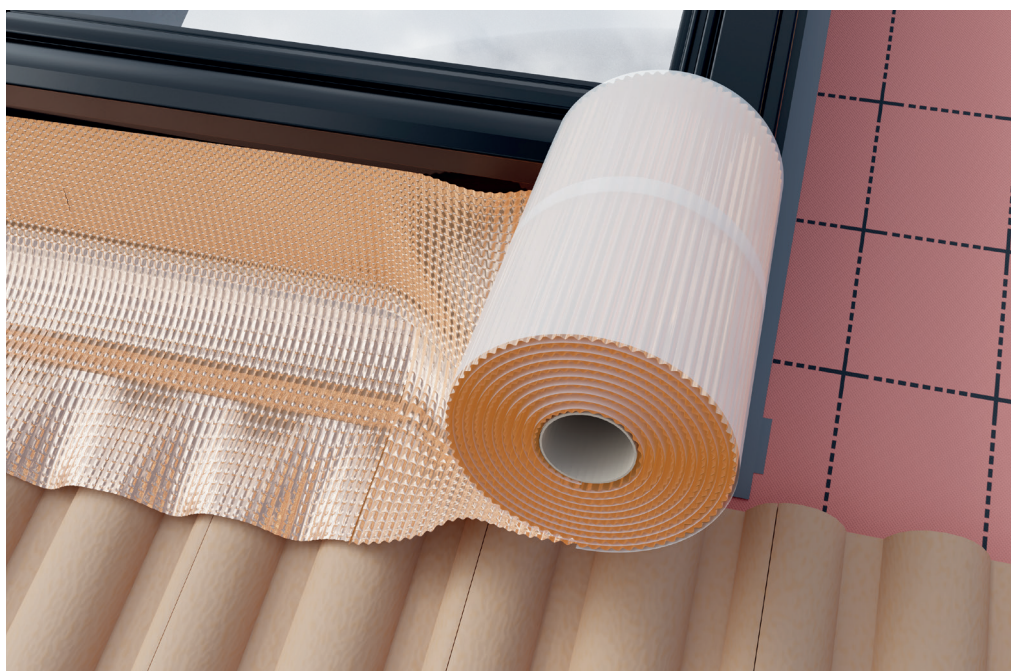

Composition:

- 1 Copper
- 2 Butylic glue
- 3 Silicon liner

Features:



Technical data sheet

Material		copper / butyl
Copper stripe		0,10 mm
Butylic glue thickness		1,5 mm
Roll length		5,00 m
UV rays stability		stable*
Ageing resistance		resistant
Temperature resistance		-30°C / +90°C
Processing temperature		+5°C / +40°C
Alu development		1,30%
Storage		dry, protected from UV rays, max. +30°C
Packaging		1 pc/box
Pallet		48 boxes

Codes and measures

Colours / Measures	300 mm
Copper	01108305

*with reference to the Central European climate
Riwega Srl is not responsible for negligent and improper use of its products