


# USB Drenlam Light


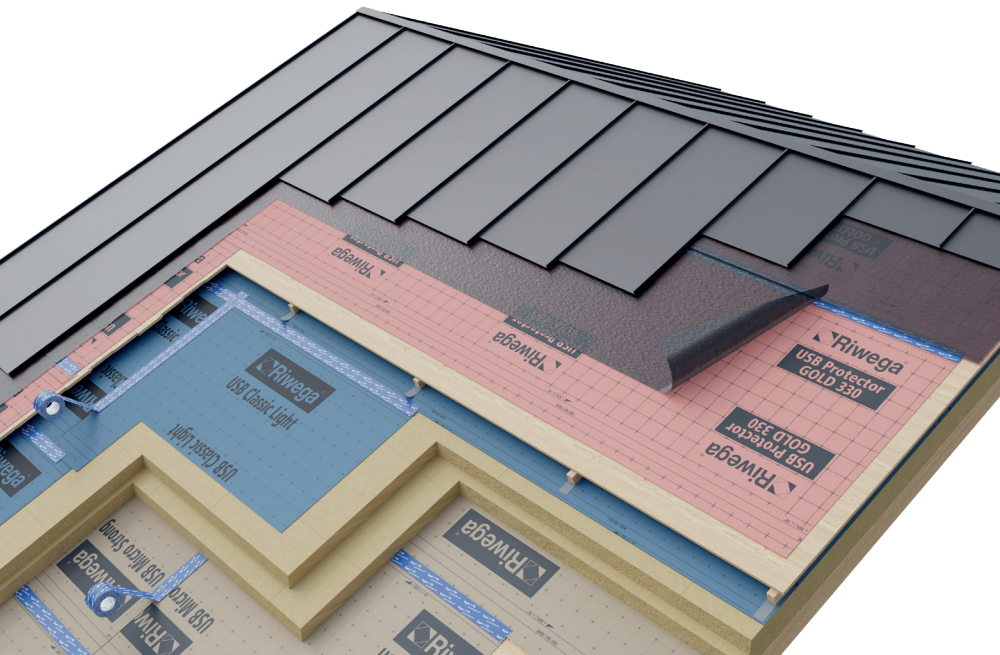


## QUICK OVERVIEW: STRENGTHS

### Universal sounddeadening layer in 100% polypropylene

- Separation layer for metal roofs
- Great sound-deadening effect
- Guarantees an optimal micro ventilation for the evacuation of condensation
- 100% virgin PP (non-recycled) for guaranteed extended durability

### Features:

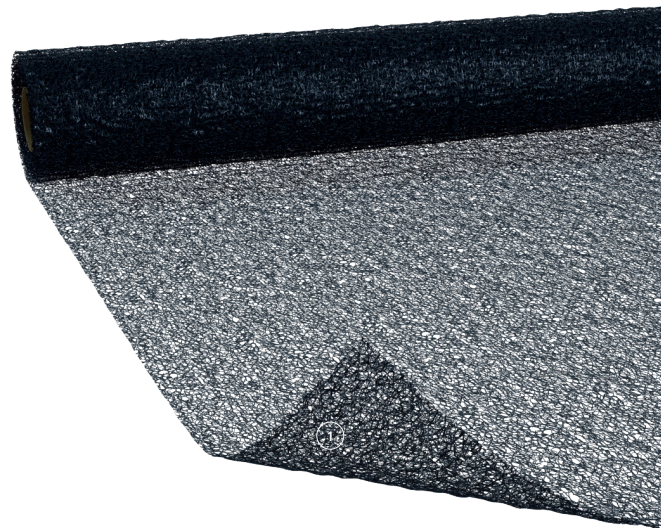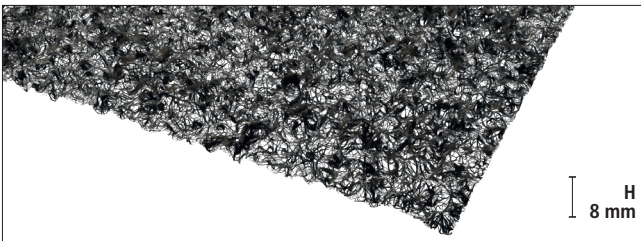

### Technical data sheet

Material	PP with carbon black	
Colour	Black	
Use underneath PV panels	NO	
Mass per unit area	EN 1849-2	350 g/m <sup>2</sup>
Thickness		8 mm
Tensile strength MD/CD*	EN ISO 12311-1	75 / 22 N/50mm
Elongation MD/CD*	EN ISO 12311-1	40 / 40 %
Void ratio		min. 95 %
Noise reduction	EN ISO 712-2	ΔLW 28 dB
Fire reaction class	EN 13501-1	E
UV stability		3 months
Temperature resistance		-40°/+90°C

### Composition:

Three-dimensional netting in PP with carbon black ①

### Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m <sup>2</sup> )
02064010	-	1,25	28	315

\*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products