

USB Micro 150 Vario


31

R2

QUICK OVERVIEW: STRENGTHS

The upgrade of variable hygrometric

- Vapour control layer with variable hygrometric
- High tearing resistance due to heavy grammage
- Perfect for insufflation
- Perfect regulation of vapour passage based on temperature and humidity
- Easy drying of the bottom side during summer

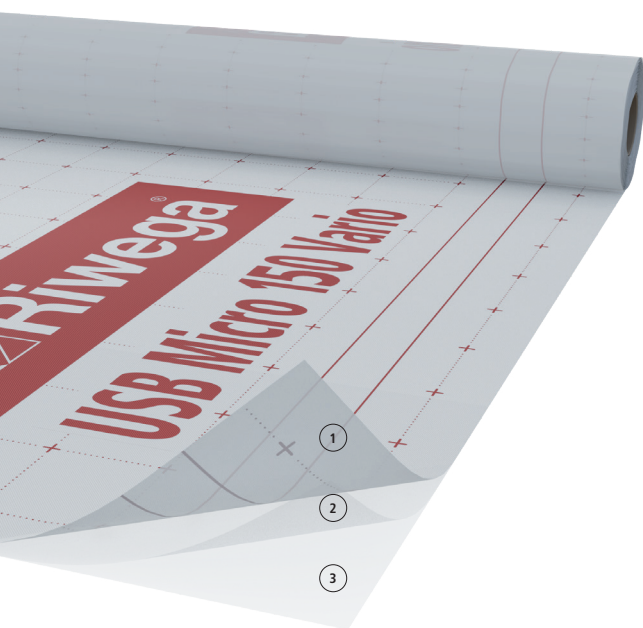

Composition:

- ① Support layer in PET
- ② Functional film in PA
- ③ Protective layer in PP

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m²)
02030145	-	1,5	50	1500

Features:



Classification:



Technical data sheet

Material	PET.PA.PP	
Film	PA	
Colour	White	
Mass per unit area	EN 1849-2	150 g/m²
Thickness		0,78 mm
Sd value	EN ISO 12572	0,2 - 20 m
Water vapour permeability	EN ISO 12572	~ 100 - 1 g/m²/24 h
Watern column	EN 20811	>200 cm
Water tightness	EN 13984	passed
Tensile strength MD/CD*	EN 12311-1	430 / 170 N/50mm
Elongation MD/CD*	EN 12311-1	25 / 110 %
Tear resistance MD/CD*	EN 12310-1	125 / 200 N
Fire reaction class	EN 13501-1	E
UV stability		3 months
Temperature resistance		-40°/+100°C

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products