

DB 200



34

R2

QUICK OVERVIEW: STRENGTHS

Easy and effective choice with high grammage

- Vapour control layer
- High tearing resistance
- Regulates the vapour flow
- Ideal as a temporary waterproofing system during the different working phases on the working site

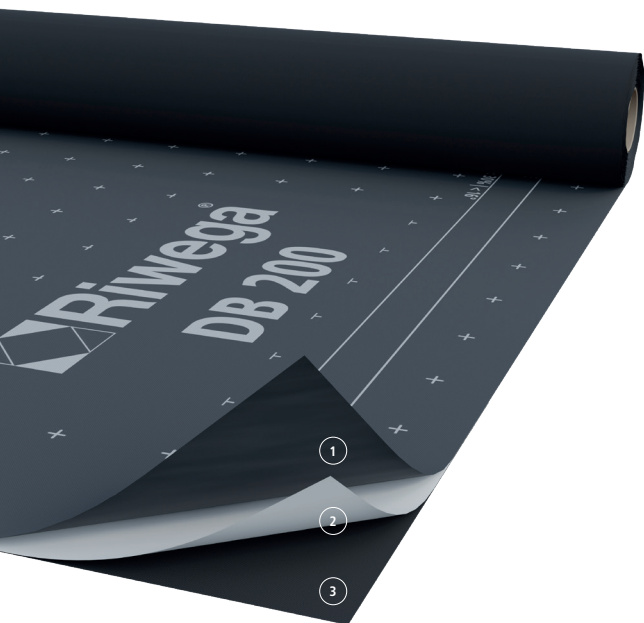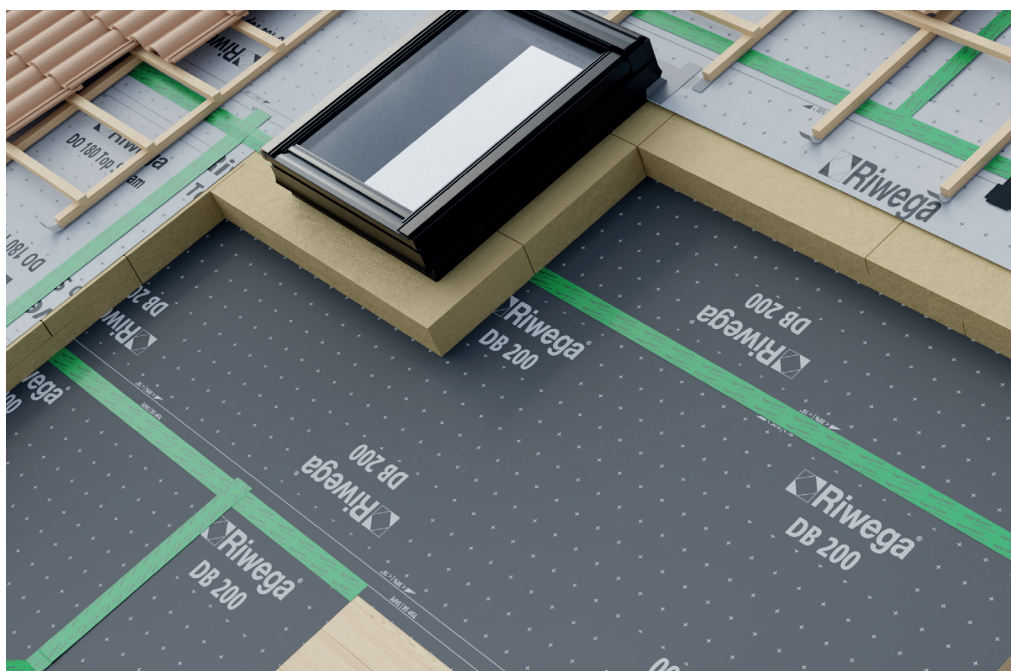

Composition:

- ① Protective UV stabilized, water repellent layer in PP
- ② Functional film in PP, watertight and lightly breathable
- ③ Protective layer in PP

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m ²)
02030200	02020316	1,5	50	1500

Features:



Classification:



Technical data sheet

Material	PP,PP,PP	
Film	PP	
Colour	Antracite grey	
Mass per unit area	EN 1849-2	200 g/m ²
Thickness		0,80 mm
Sd value	EN ISO 12572	6 m
Water vapour permeability	EN ISO 12572	~ 3 g/m ² /24 h
Watern column	EN 20811	>200 cm
Water tightness	EN 1928 (Met. A)	passed
Tensile strength MD/CD*	EN 12311-1	480 / 330 N/50mm
Elongation MD/CD*	EN 12311-1	75 / 120 %
Tear resistance MD/CD*	EN 12310-1	260 / 360 N
Fire reaction class	EN 13501-1	E
UV stability		3 months
Temperature resistance		-40°/+90°C

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products