


DB 155

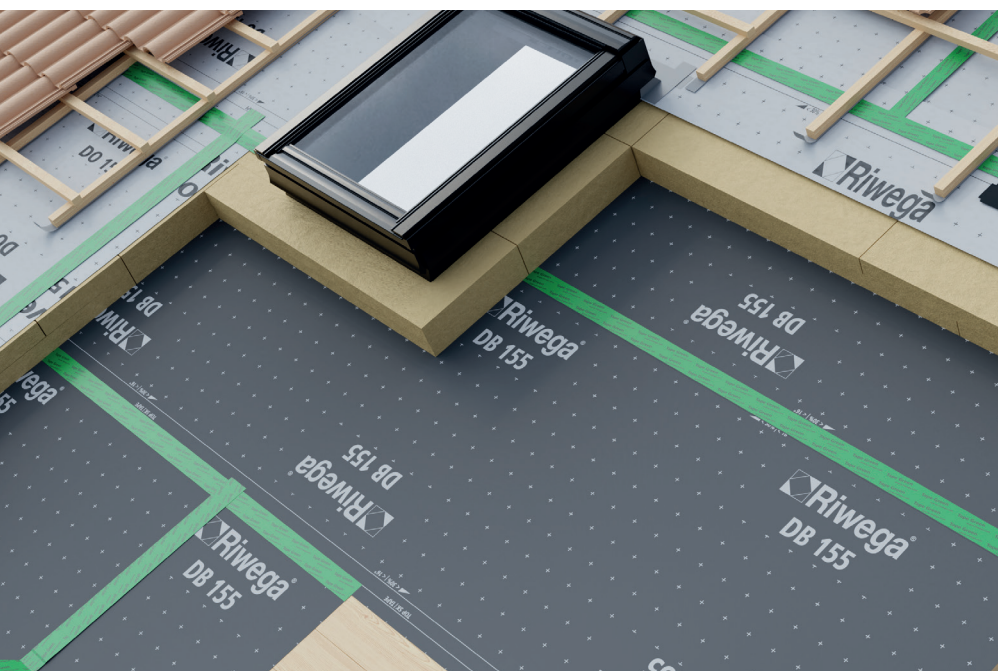

35
R2

QUICK OVERVIEW: STRENGTHS


Easy and effective choice with medium grammage

- Vapour control layer
- Light membrane for roofs and resistant membrane for walls
- Regulates the vapour flow
- Ideal also as a temporary waterproofing system during the different working phases on the working site

Features:



Classification:

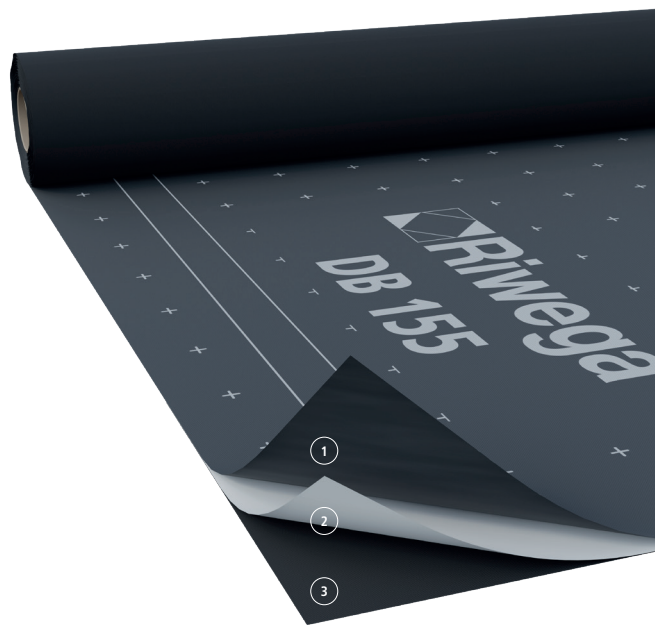

Technical data sheet

Material	PP.PP.PP	
Film	PP	
Colour	Antracite grey	
Mass per unit area	EN 1849-2	155 g/m ²
Thickness		0,60 mm
Sd value	EN ISO 12572	2 m
Water vapour permeability	EN ISO 12572	~ 15 g/m ² /24 h
Water column	EN 20811	>200 cm
Water tightness	EN 1928 (Met. A)	passed
Tensile strength MD/CD*	EN 12311-1	350 / 230 N/50mm
Elongation MD/CD*	EN 12311-1	75 / 115 %
Tear resistance MD/CD*	EN 12310-1	185 / 225 N
Fire reaction class	EN 13501-1	E
UV stability		3 months
Temperature resistance		-40°/+90°C

Composition:

- Protective UV stabilized, water repellent layer in PP ①
- Functional film in PP, watertight and lightly breathable ②
- Protective layer in PP ③

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m ²)
02030190	02020311	1,5	50	1500

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products