


# DS 65 PE

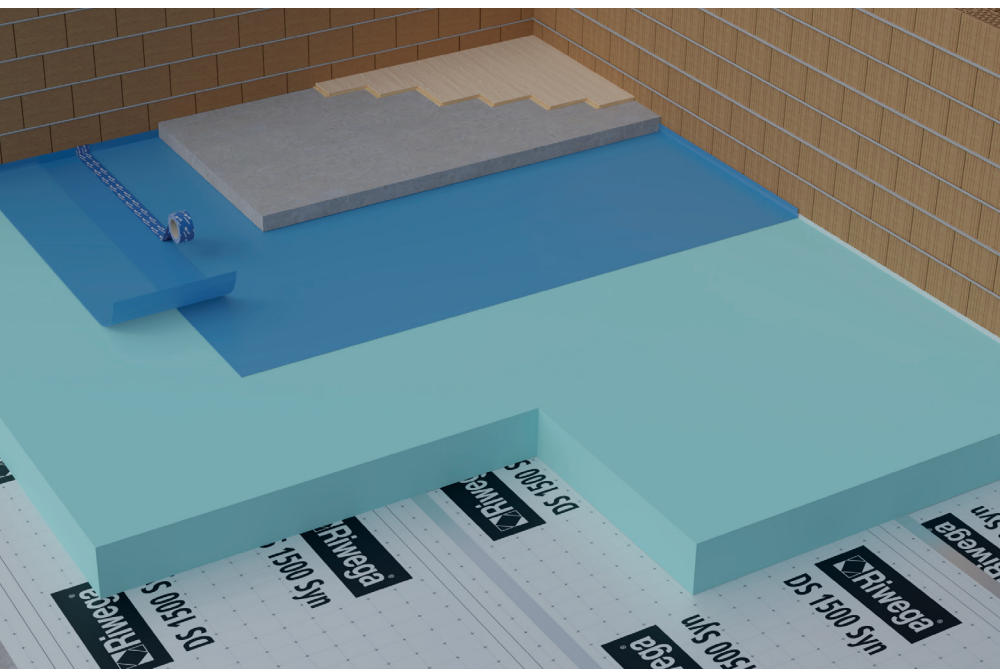

## QUICK OVERVIEW: STRENGTHS


### The multipurpose barrier 100% in PE

- Vapour barrier
- Only 3 m height available to ease and speed up laying time
- Ideal to be laid under the screeds as a separation and sliding layer
- Minimizes the passage of water vapour and guarantees a perfect airtight building envelope

#### Features:



#### Classification:

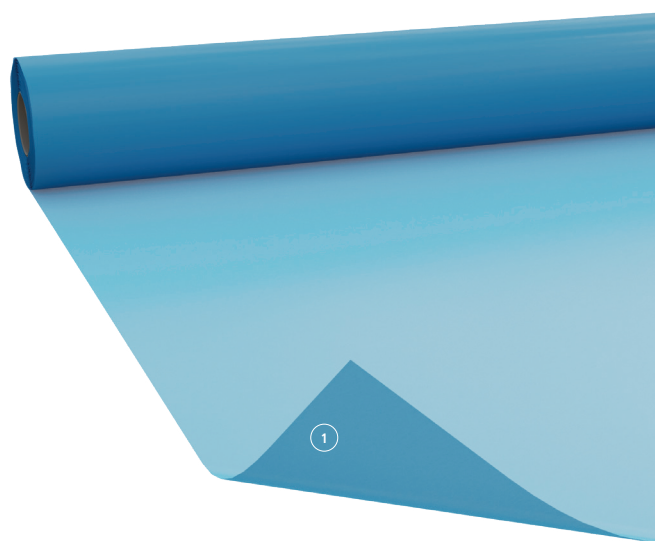

#### Technical data sheet

Material	PE	
Colour	Semi-transparent light blue	
Mass per unit area	EN 1849-2	188 g/m <sup>2</sup>
Thickness		0,20 mm
Sd value	EN ISO 12572	140 m
Water vapour permeability	EN ISO 12572	~ 0,2 g/m <sup>2</sup> /24 h
Water column	EN 20811	-
Water tightness	EN 13984	passed
Tensile strength MD/CD*	EN 12311-1	175 / 160 N/50mm
Elongation MD/CD*	EN 12311-1	500 / 570 %
Tear resistance MD/CD*	EN 12310-1	130 / 135 N
Fire reaction class	EN 13501-1	E
UV stability		-
Temperature resistance		-20°/+80°C

#### Composition:

Film in PE (1)

#### Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m <sup>2</sup> )
02064006	-	3,0	33	3960

\*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products