

Tape 1 PE



01

R3

QUICK OVERVIEW: STRENGTHS

Single-sided acrylic tape

- The extreme flexibility makes it easily adaptable to any laying situation
- Next-generation acrylic glue, high adhesion, solvent-free
- Dual use, internal and exterior, thanks to the waterproof surface
- Particularly resistant to UV rays and ageing

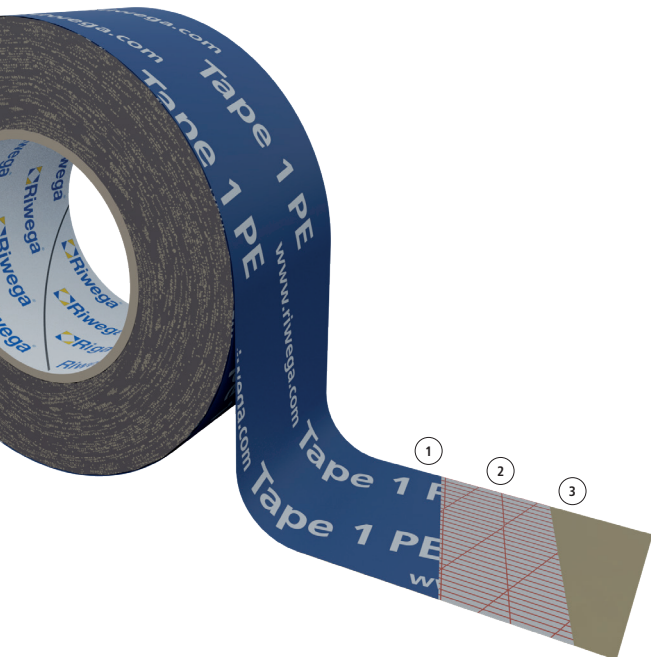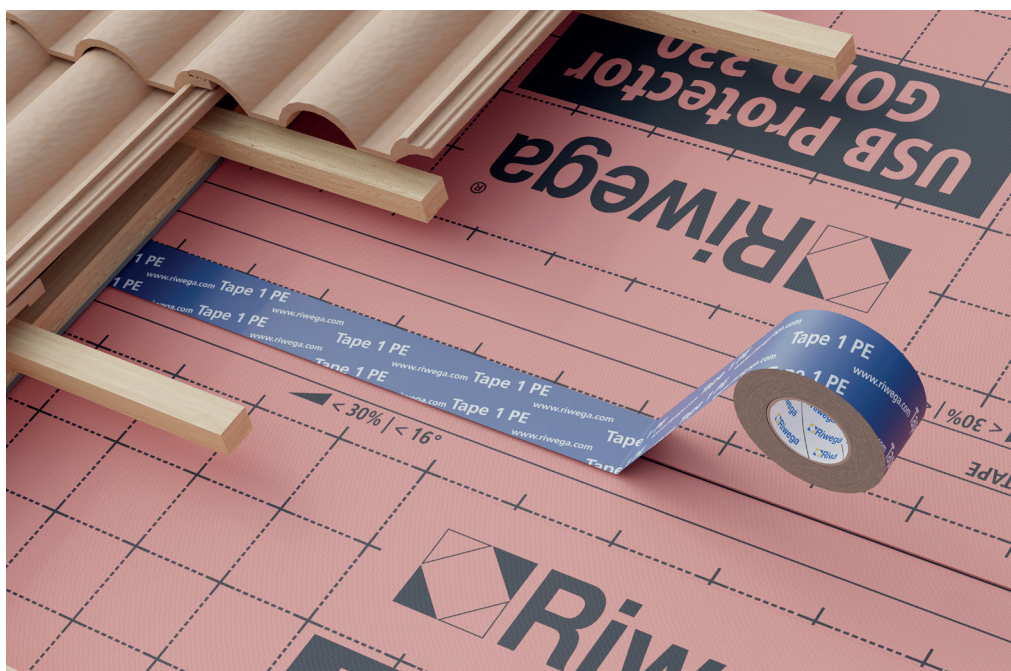

Composition:

- 1 Polyethylene
- 2 Acrylic glue with PET reinforcing
- 3 Silicone liner

Codes and measures

| Version | Code | Measures (mmxm) | Box (pc) | Pallet (box) |
|-----------------|----------|-----------------|----------|--------------|
| Tape 1 PE | 02040160 | 60x25 | 10 | 80 |
| Tape 1 PE 100 X | 02040193 | 100x25 | 6 | 80 |
| Tape 1 PE 150 | 02040194 | 150x25 | 4 | 80 |

Features:



Classification:



Technical data sheet

| | | |
|---------------------------------|--------------|---|
| Glue | | polyacrylate-based disp. |
| Glue carrier material | | LDPE film |
| Reinforcing mesh | | YES |
| Protection liner | | YES |
| Solvents and emollients | | NO |
| Thickness | DIN EN 1942 | 0,27 - 0,29 mm |
| Sd value | | ~12 m |
| Tear resistance with elasticity | DIN EN 14410 | ≥25 N/25 mm; 300 % |
| Bond strength | DIN 4108-11 | compliant |
| Resistance to condensation | | very high |
| Resistance to aging | | very high |
| Initial adhesion (Tack) | | very high |
| Emissions | EMICODE® | EC1 ^{PLUS} |
| Working temperature | | +5°C / +30°C favorable from -10°C |
| Temperature resistance | | -30°C / +100°C |
| UV stability | | 24 months* |
| Storage place | | dry, protected from UV rays, +18°C / +25°C |
| Storage period | | max. 24 months |

*with reference to the Central European climate
Riwega Srl is not responsible for negligent and improper use of its products