

Tape Rapid


03

R3

QUICK OVERVIEW: STRENGTHS

The quickest ever

- Single-sided acrylic tape
- Speed up installation because of the absence of the liner
- Next-generation acrylic glue, high adhesion, solvent-free
- Dual use, internal and exterior, thanks to the waterproof surface
- Minimizes waste on the building site

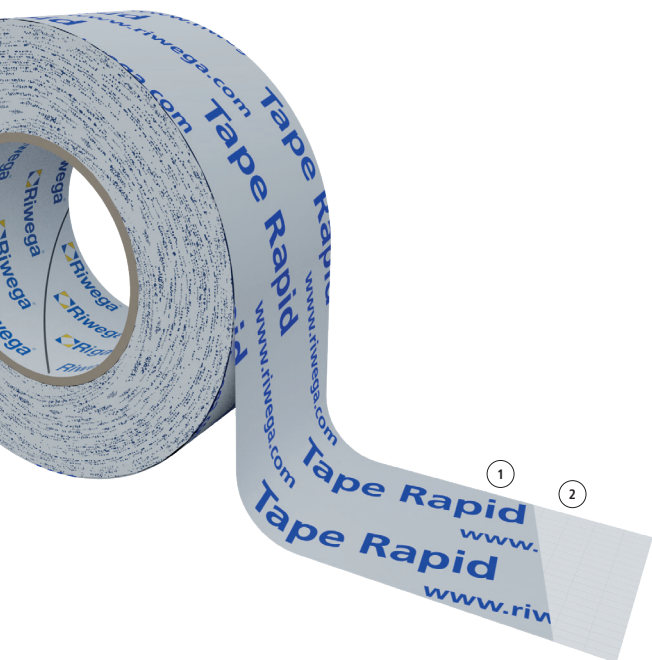

Composition:

- ① LDPE/PP
- ② Acrylic glue with PET reinforcing

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Tape Rapid	02040162	60x50	10	80

Features:



Classification:



Technical data sheet

Glue		polyacrylate-based disp.
Glue carrier material		LDPE/PP film
Reinforcing mesh		YES
Protection liner		NO
Solvents and emollients		NO
Thickness	DIN EN 1942	0,23 - 0,27 mm
Sd value		~40 m
Tear resistance with elasticity	DIN EN 14410	≥35 N/25 mm; 400 %
Bond strength	DIN 4108-11	compliant
Resistance to condensation		high
Resistance to aging		very high
Initial adhesion (Tack)		very high
Emissions	EMICODE®	EC1 ^{PLUS}
Working temperature		+5°C / +30°C
Temperature resistance		-30°C / +120°C
UV stability		24 months*
Storage place		dry, protected from UV rays, +18°C / +25°C
Storage period		max. 24 months

*with reference to the Central European climate
Riwega Srl is not responsible for negligent and improper use of its products