

Tape 1 PAP



07

R3

QUICK OVERVIEW: STRENGTHS

The tape for internal use

- Single-sided acrylic tape
- Perfect for sealing any interruption of vapour control layers and wooden surfaces
- Paper surface, usable indoors only
- Next-generation acrylic glue, high adhesion, solvent-free

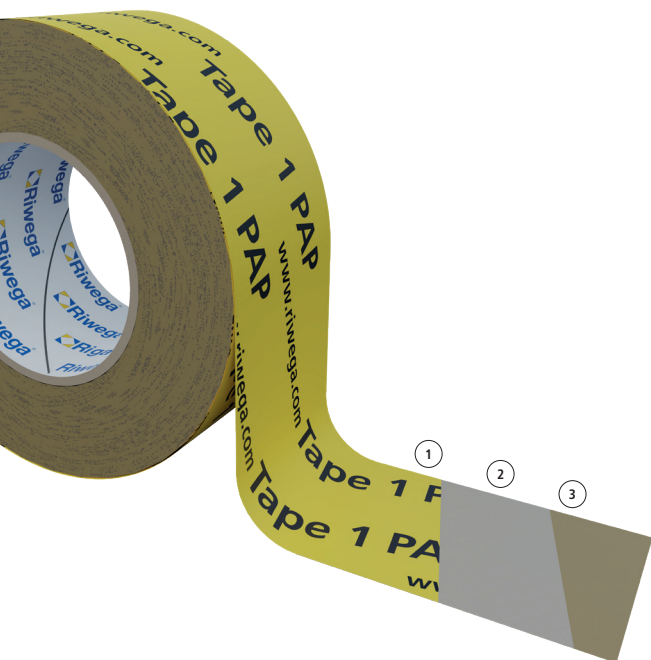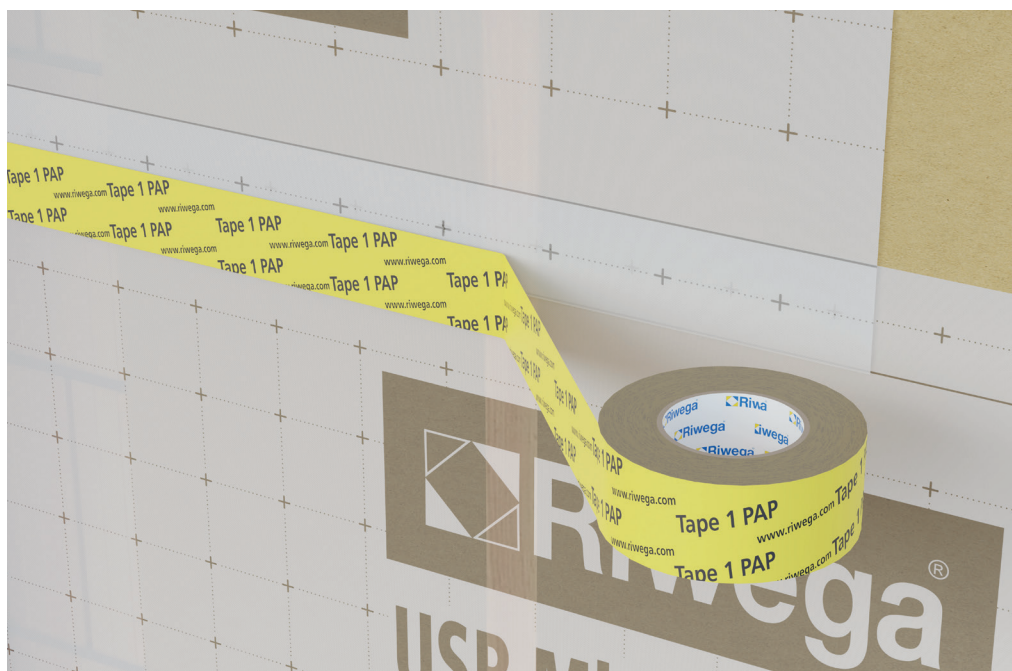

Features:



Classification:



Composition:

- 1 Paper with PE coating
- 2 Acrylic glue
- 3 Silicone liner*

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Tape 1 PAP	02040150	60x25	10	80
Tape 1 PAP X	02040151	30+30x25	10	80
Tape 1 PAP X3	02040152	30+15+15x25	10	80

Technical data sheet

Glue		polyacrylate-based disp.
Glue carrier material		paper with PE coating
Reinforcing mesh		NO
Protection liner		YES
Solvents and emollients		NO
Thickness	DIN EN 1942	0,32 - 0,34 mm
Sd value		~5 m
Tear resistance with elasticity	DIN EN 14410	≥150 N/25 mm; 3-5 %
Bond strength	DIN 4108-11	compliant
Resistance to condensation		very high
Resistance to aging		very high
Initial adhesion (Tack)		very high
Working temperature		+5°C / +30°C
Temperature resistance		-30°C / +100°C
Storage place		dry, protected from UV rays, +18°C / +25°C
Storage period		max. 24 months

*variants with pre-cutted silicone liner: Tape 1 PAP X (30+30 mm) and Tape 1 PAP X3 (30+15+15 mm)
Riwega Srl is not responsible for negligent and improper use of its products