

Tape Reflex



08
R3

QUICK OVERVIEW: STRENGTHS

The reflective one

- Single-sided acrylic tape
- Specially designed for sealing of USB Reflex Plus and DS 188 ALU
- Dual use, interior and exterior, thanks to the reflective surface
- Next-generation acrylic glue, high adhesion, solvent-free

Features:




Classification:



Technical data sheet

Glue		polyacrylate-based disp.
Glue carrier material		alu sprayed PP film
Reinforcing mesh		NO
Protection liner		YES
Solvents and emollients		NO
Thickness	DIN EN 1942	0,20 - 0,25 mm
Sd value		-42 m
Tear resistance with elasticity	DIN EN 14410	≥ 70 N/25 mm; 80 %
Bond strength	DIN 4108-11	compliant
Resistance to condensation		very high
Resistance to aging		very high
Initial adhesion (Tack)		very high
Working temperature		+5°C / +30°C
Temperature resistance		-30°C / +100°C
UV stability		1 month*
Storage place		dry, protected from UV rays, +18°C / +25°C
Storage period		max. 24 months

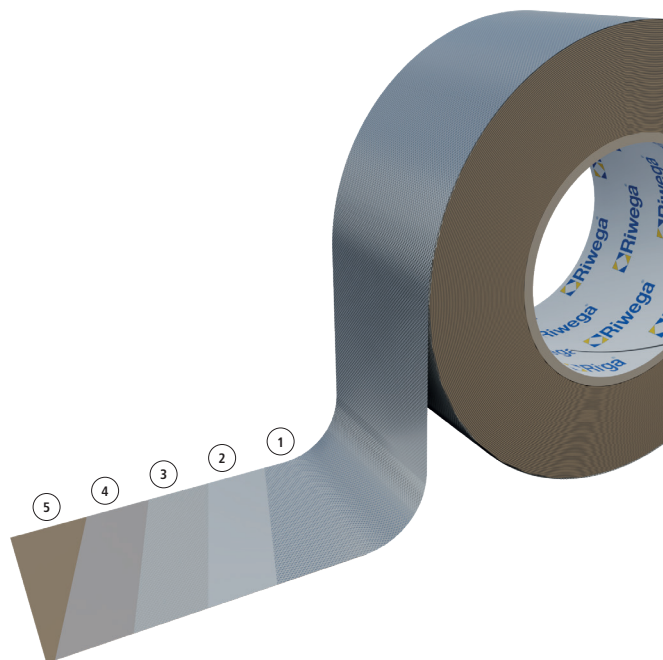

Composition:

- Aluminium sprayed PP film ①
- PP film ②
- Non-woven fabric in PP ③
- Acrylic glue ④
- Silicone liner ⑤

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Tape Reflex	02040180	80x25	6	-

*with reference to the Central European climate
Riwega Srl is not responsible for negligent and improper use of its products