

# Tape Vlies


09

R3

## QUICK OVERVIEW: STRENGTHS

### The plasterable one

- Single-sided acrylic tape
- Surface designed for points that need to be plastered over
- For the connection points of wood and plastering surfaces
- Next-generation acrylic glue, high adhesion, solvent-free

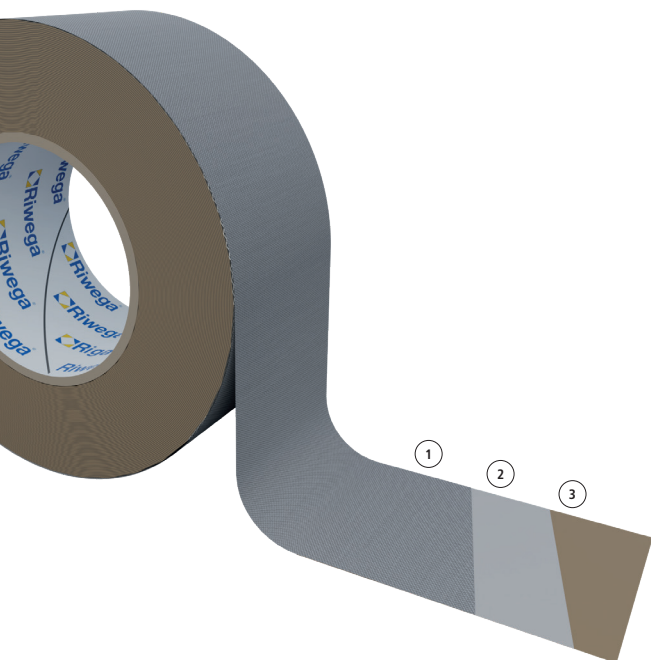

### Composition:

- ① Non-woven fabric in PP
- ② Acrylic glue
- ③ Silicone liner

### Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Tape Vlies	02045800	50x25	12	-

### Features:



### Classification:



### Technical data sheet

Glue		polyacrylate-based disp.
Glue carrier material		non-woven fabric in PP
Reinforcing mesh		NO
Protection liner		YES
Solvents and emollients		NO
Thickness	DIN EN 1942	0,55 - 0,57 mm
Sd value		~8 m
Tear resistance with elasticity	DIN EN 14410	≥50 N/25 mm; 40 %
Bond strength	DIN 4108-11	compliant
Resistance to condensation		very high
Resistance to aging		very high
Initial adhesion (Tack)		very high
Working temperature		+5°C / +30°C
Temperature resistance		-30°C / +100°C
Storage place		dry, protected from UV rays, +18°C / +25°C
Storage period		max. 24 months