


Tape Green

10

R3

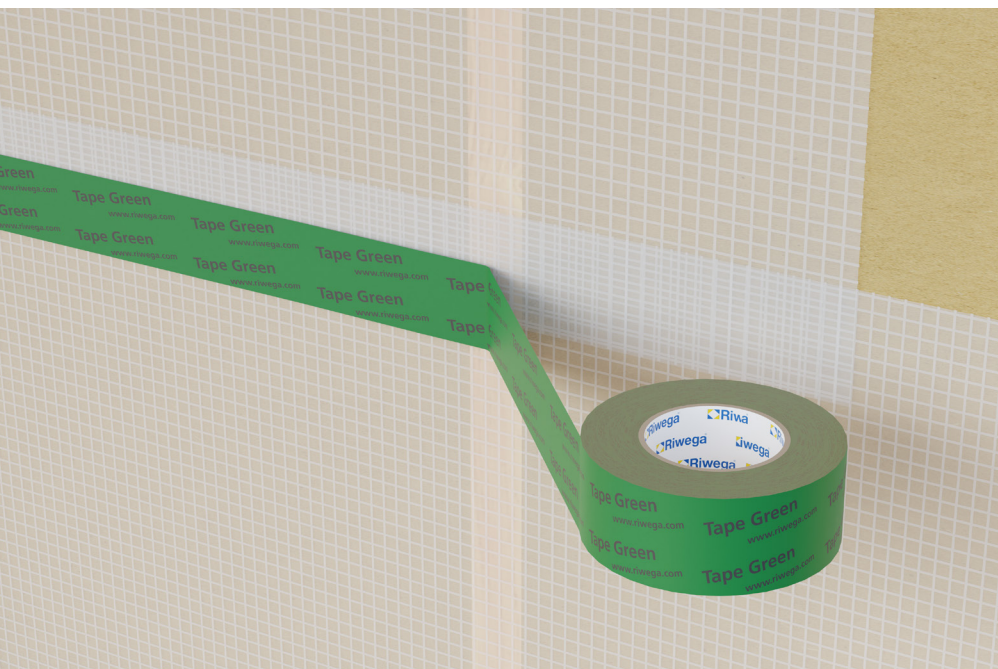

QUICK OVERVIEW: STRENGTHS

The essence of sealing

- Single-sided acrylic tape
- Excellent quality/price ratio
- Perfect for sealing any interruption of vapour control layers and wooden surfaces
- Dual use, internal and exterior, thanks to the waterproof surface
- High adhesion acrylic glue, solvent-free

Features:




Classification:



Technical data sheet

Glue		pure polyacrylate
Glue carrier material		film in PE
Reinforcing mesh		YES
Protection liner		YES
Solvents and emollients		NO
Thickness	DIN EN 1942	~0,28 mm
Sd value		~40 m
Tear resistance with elasticity	DIN EN 14410	≥22 N/10 mm; 586 %
Bond strength	DIN 4108-11	compliant
Resistance to condensation		high
Initial adhesion (Tack)		high
Emissions	EMICODE®	EC1 ^{PLUS}
Working temperature		+5°C / +30°C
Temperature resistance		-40°C / +80°C
UV stability		12 months*
Storage place		dry, protected from UV rays, +18°C / +25°C
Storage period		max. 24 months

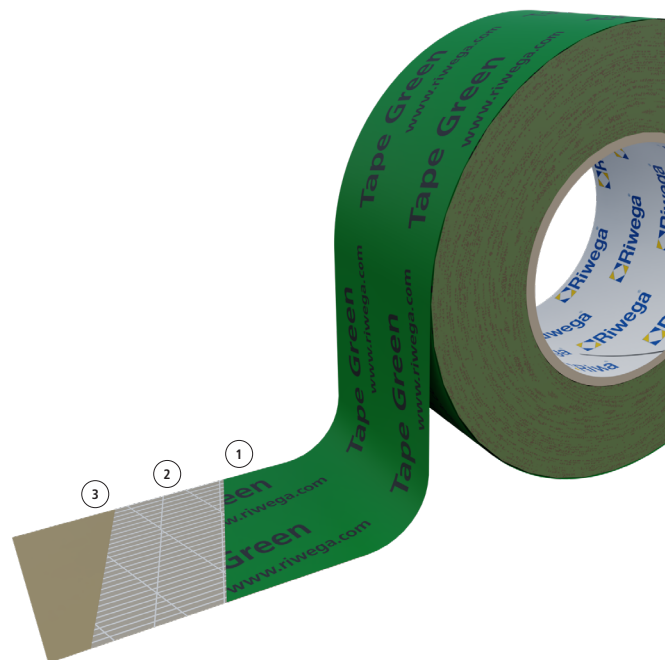

Composition:

- Polyethylene ①
- Acrylic glue with PET reinforcing ②
- Silicone liner ③

Codes and measures

Version	Code**	Measures (mmxm)	Box (pc)	Pallet (box)
Tape Green	02040161	50x25	12	85
Tape Green 60	020401616	60x25	10	85

*with reference to the Central European climate

**on request also available in Industry version

Riwega Srl is not responsible for negligent and improper use of its products