


Tape BOLD

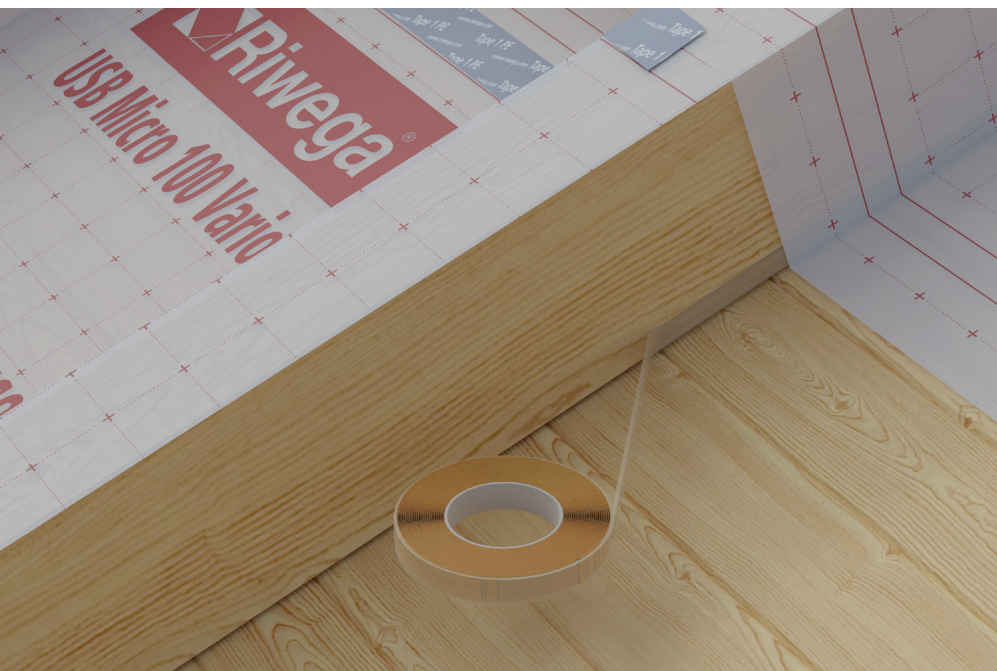


QUICK OVERVIEW: STRENGTHS

The reinforced, double-faced one

- Double-sided acrylic adhesive tape
- Highly adhesive acrylic mass on polyester mesh
- Ideal for taping vapour barriers and breathable membranes to wooden or wall structures
- High adhesion acrylic glue, solvent-free, with viscoelastic and thixotropic effects

Features:

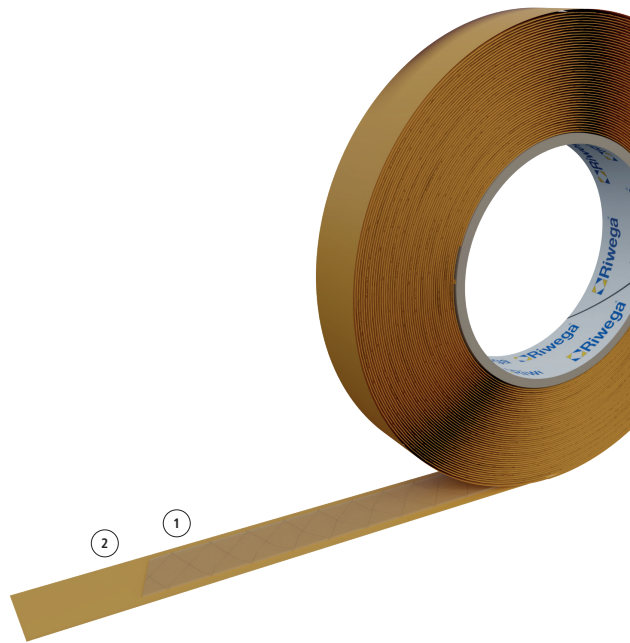

Technical data sheet

Glue		polyacrylate-based disp.
Glue carrier material		-
Reinforcing mesh		YES
Protection liner		YES
Solvents and emollients		NO
Thickness	DIN EN 1942	1,50 - 2,00 mm
Peel adhesion	AFERA 5001	≥25 N/25 mm
Resistance to condensation		high
Resistance to aging		high
Initial adhesion (Tack)		high
Working temperature		+5°C / +30°C
Temperature resistance		-30°C / +80°C
Storage place		dry, protected from UV rays, +18°C / +25°C
Storage period		max. 24 months

Composition:

- Acrylic glue with PET mesh (1)
- Silicone liner (2)
- (3)

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Tape BOLD	02040210	10x12	10	80