


Coll ALU

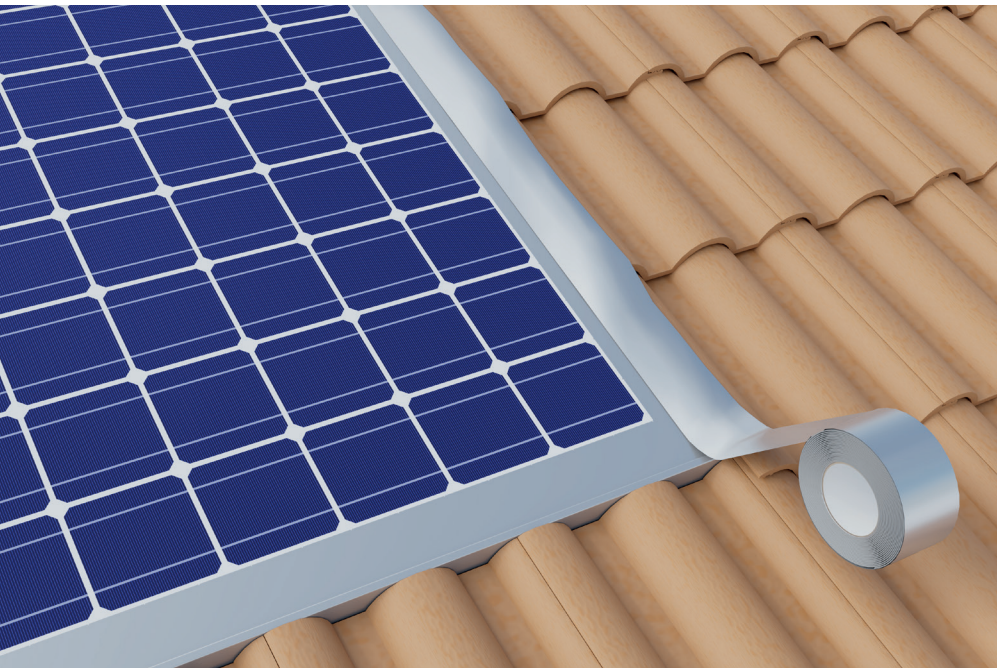

17

R3

QUICK OVERVIEW: STRENGTHS

The fitting that is not afraid of UV rays

- Mono adhesive butyl tape
- Ideal for invisible repair of breakages on sheet metal parts
- Perfect for sealing solar and photovoltaic panels
- Particularly resistant to weathering and ageing

Features:




Classification:



Technical data sheet

Glue		butyl
Glue carrier material		alu film
Protection liner		YES
Solvents and emollients		NO
Thickness		0,6 mm
Tensile strength MD/CD**	EN 12311-1	180 / 190 N/50mm
Elongation at break MD/CD**	EN 12311-1	15 / 20 %
Probe tack	ASTM D 2979	8.0 N
180° Peel Adhesion	ASTM D 1000	20 N/cm
Solid content	DIN EN ISO 10563	100 %
Vertical scrolling	ISO 7390	0 mm
Vapour passage resistance μ	EN 1931	1530000
Working temperature		+0°C / +40°C
Temperature resistance		-30°C / +90°C
UV stability		high*
Storage place		dry, protected from UV rays, ~20°C
Storage period		max. 12 months

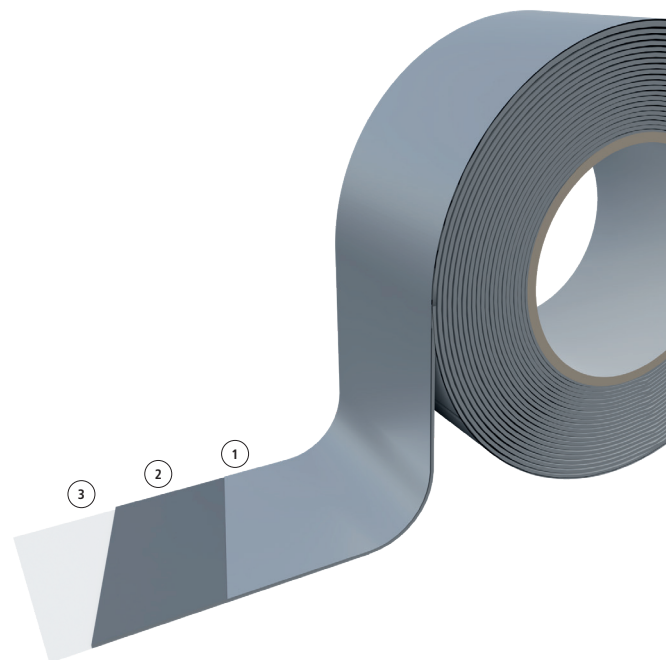

Composition:

- Aluminium film ①
- Butylic glue ②
- Silicone liner ③

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Coll ALU 75	02044073	75x10	8	60
Coll ALU 150	02044074	150x10	4	60

*with reference to the Central European climate

**MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products