

Tape 2 BU



18

R3

QUICK OVERVIEW: STRENGTHS

The most performing adhesive

- Double-sided butyl tape
- Ideal for attaching membranes to any type of structure
- Guarantees seal even in case of movement of the supporting material
- High adhesion butyl glue, solvent-free

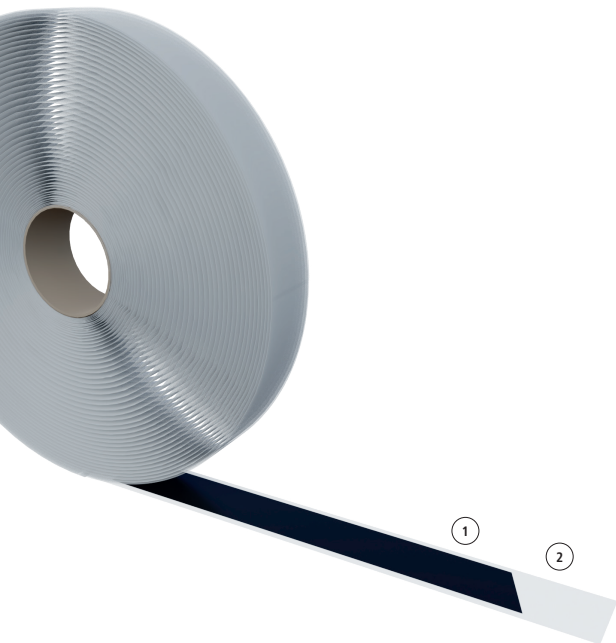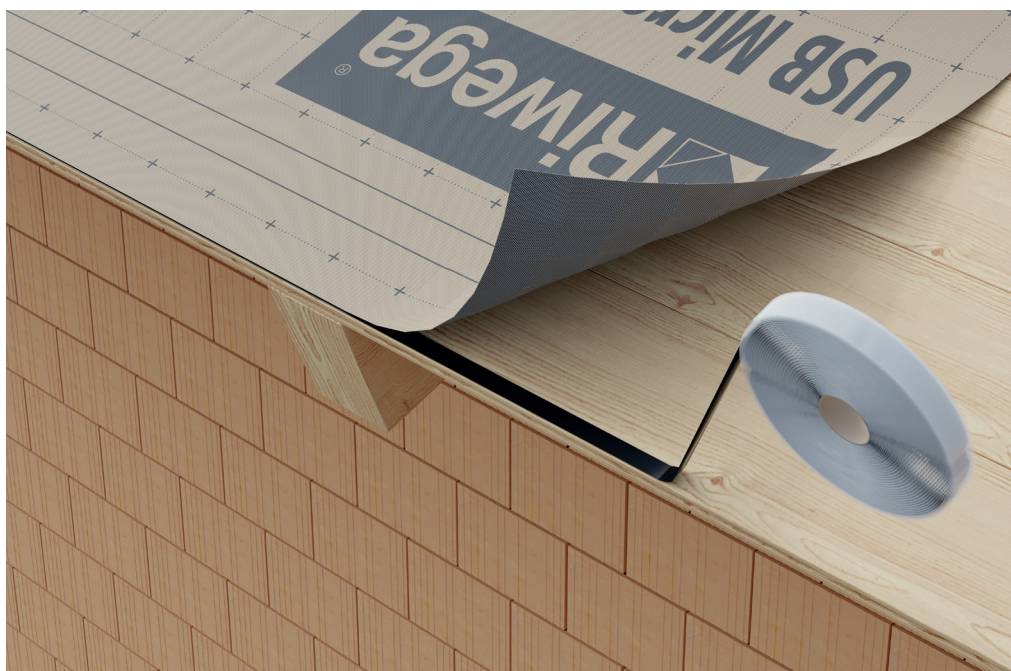

Composition:

- 1 Butyl
- 2 Silicone liner

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Tape 2 BU	02040315	20x25	14	30

Features:



Technical data sheet

Glue		butyl
Glue carrier material		-
Protection liner		YES
Thickness		1,5 mm
Specific weight	DIN EN ISO 1183-1	~1,3 g/cm³
Viscosity (with thickness <2 mm)	DIN EN ISO 7390	stable fino a +100°C
Hardness (Shore 00)	DIN EN ISO 868	~30
Compressive strength	DTU 39.4	>0,03 N/mm²
Solid content	DIN EN ISO 10563	>99 %
Emissions	EMICODE®	very low
Working temperature		+5°C / +30°C
Operating temperature		-40°C / +100°C
Fire class	DIN 4102	B2
Storage place		dry, protected from UV rays, ~20°C
Storage period		max. 12 months