


FDB EXT

26

R3

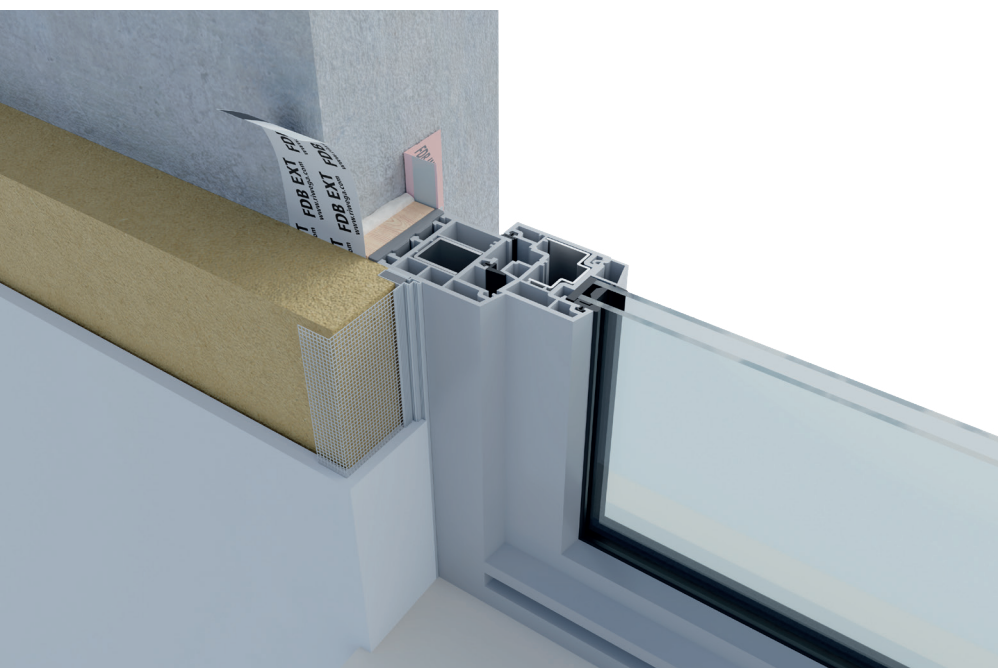

QUICK OVERVIEW: STRENGTHS

The perfect external sealing of window and door

- Breathable adhesive tape
- Outside use
- Windtight sealing of door and window joints
- Overplasterable surface
- Available in several types to ensure tightness on every laying surface

Features:



Composition:

- ① Multilayer non-woven PET.PP.PET
- ② Butylic strip / acrylic strip
- ③ Silicone liner



Technical data sheet

| | | |
|-----------------------------|--------------|--------------------------------|
| Glue | | acrylic/butyllic |
| Glue carrier material | | PET.PP.PET |
| Thickness | DIN 53855 | 0,37 mm |
| Sd value | EN ISO 12572 | 0,04 m |
| Resistance to water passage | EN 1928 | W1 |
| Tensile strength MD/CD* | EN 12311-1 | 290 / 31 N/50mm |
| Elongation at break MD/CD* | EN 12311-1 | 19 / 130 % |
| Fire reaction class | EN 13501-1 | E |
| Working temperature | | +5°C / +40°C |
| Temperature resistance | | -40°C / +80°C |
| UV stability | | 3 months |
| Storage place | | dry, protected from UV rays |
| Storage period | | max. 24 months |

Codes and measures

| Version | Code | Measures (mmxm) | Box (pc) | Pallet (box) |
|-------------------|----------|-----------------|----------|--------------|
| FDB EXT AC 75 | 02045612 | 75x30 | 5 | 96 |
| FDB EXT AC 100 | 02045613 | 100x30 | 4 | 96 |
| FDB EXT AC 150 | 02045614 | 150x30 | 2 | 96 |
| FDB EXT AC+AC 75 | 02045622 | 75x30 | 5 | 96 |
| FDB EXT AC+AC 100 | 02045623 | 100x30 | 4 | 96 |
| FDB EXT AC+AC 150 | 02045624 | 150x30 | 2 | 96 |
| FDB EXT AC+BU 75 | 02045632 | 75x25 | 5 | 96 |
| FDB EXT AC+BU 100 | 02045633 | 100x25 | 4 | 96 |
| FDB EXT AC+BU 150 | 02045634 | 150x25 | 2 | 96 |

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products