

Tip KONT Bitum

35

R3



QUICK OVERVIEW: STRENGTHS


The bituminous nail sealing tape

- Continuous nail sealing tape
- Particularly resistant to UV rays and ageing
- Guarantees air, wind and water tightness of the breathable membranes
- Thanks to its high elasticity it is resistant to dilations and vibrations

Features:



Classification:

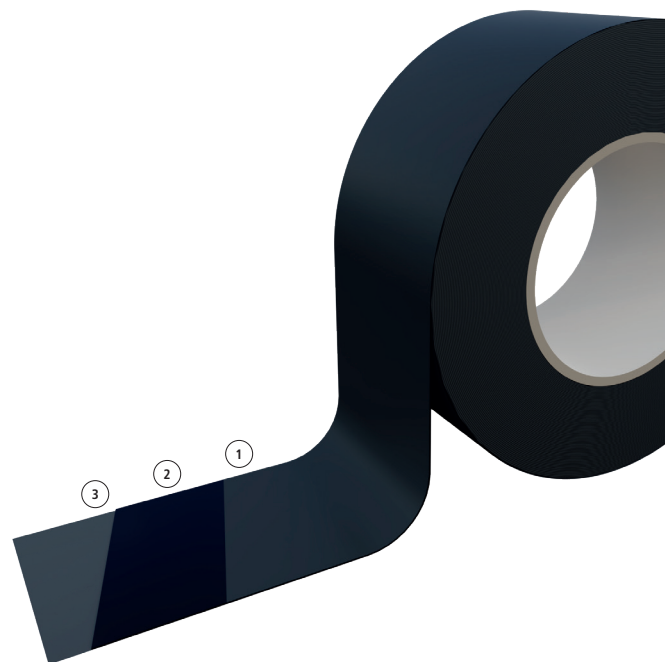

Composition:

- PE film ①
- Adhesive bitumen ②
- Silicone liner ③

Technical data sheet

Material		bitumen/PE film
Glue		adhesive bitumen
Protection liner		YES
Thickness		~1,2 mm
Colonna d'acqua		>1000 cm
Working temperature		≥+5°C**
Temperature resistance		≥-5°C
UV stability		6 months*
Storage place		dry, protected from UV rays
Storage period		max. 24 months

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Tip KONT Bitum 60	020600609	60x25	6	24
Tip KONT Bitum 70	020600709	70x25	6	24
Tip KONT Bitum 80	020600809	80x25	4	24

*with reference to the Central European climate

**if necessary, heat the surface to improve adhesion

Riweqa Srl is not responsible for negligent and improper use of its products