

Tip 60 / Tip 80


36

R3

QUICK OVERVIEW: STRENGTHS

The punctual nail sealing

- Self-adhesive single nail sealing patch
- Guarantees air, wind and water tightness of the breathable membranes
- Thanks to its high elasticity it is resistant to dilations and vibrations
- Different measurements for different needs

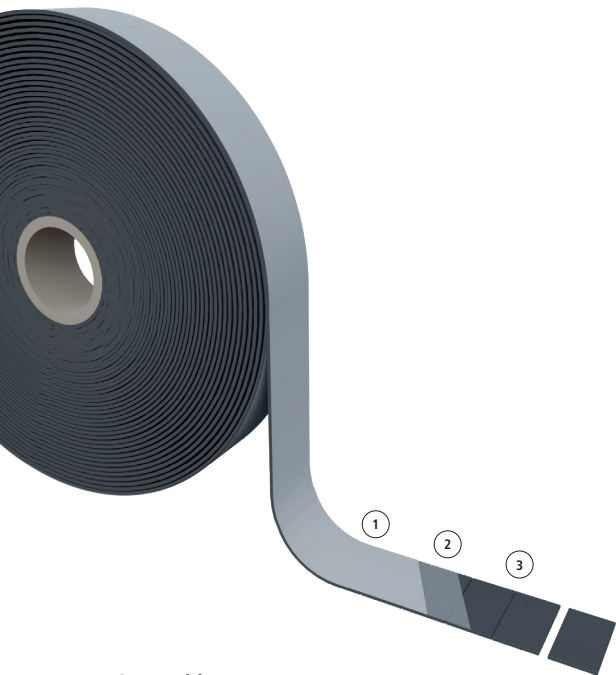

Composition:

- ① Silicone liner
- ② Acrylic glue
- ③ PVC foam

Codes and measures

Version	Code	Measures (mmxmm xm)	Roll (units)	Box (pc)
Tip 60	02045000	60x40 x20	500	10
Tip 80	02045002	80x80 x20	250	8

Features:



Technical data sheet

Material		PVC foam
Glue		acrylic
Protection liner		YES
Thickness		5 mm
Specific weight		120 kg/m ³
Peel adhesion	DIN EN 1939	≥5 N/25 mm
Shear strength	DIN EN 1943	250 g/625mm ²
Working temperature		+10°C / +30°C
Temperature resistance		-30°C / +100°C
Resistance to condensation		high
Resistance to aging		high
UV stability		high
Storage place		dry, protected from UV rays
Storage period		max. 24 months