

# GAE LVD




43  
R3

## QUICK OVERVIEW: STRENGTHS

### The essential for wooden joints

- Sealing gasket
- Waterproofing to air, water and wind of the connections in the wooden houses
- Resistant to dilatation and vibrations due to its high elasticity
- Also ideal for sealing the lower joint of the windows and doors

#### Features:

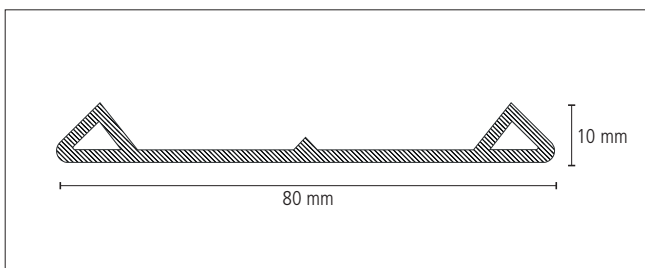

#### Composition:

Expanded elastic EPDM ①

#### Technical data sheet

Material		expanded EPDM
Side overhangs height		~10 mm
Density		0,5 g/cm <sup>3</sup>
Working temperature		-45°C / +120°C
Storage place		dry, protected from UV rays
Storage period		max. 24 months

#### Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
GAE LVD 80	02045007	80x25	12	1