

Tape Liquid


56

R3

QUICK OVERVIEW: STRENGTHS

Universal sealant in a liquid version

- One-component liquid sealant; ready to use
- Solvent and plasticizer-free, adaptable to all types of surfaces
- Ideal to seal critical points in the construction
- Reinforced with fibres, no additional non-woven fabric is required

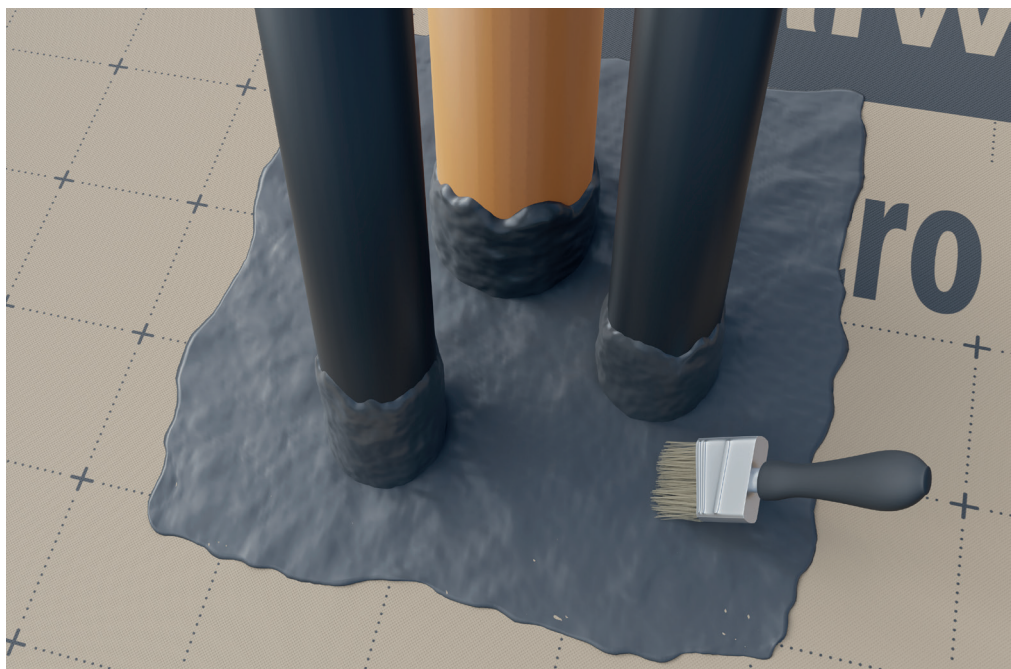

Features:



Technical data sheet

Material		polyurethane prepolymer
Consistency		fibre-reinforced thixotropic liquid
Output (depending from surface)		~3 kg/m ²
Density		~1,27 g/cm ³
Rain resistance		immediately after laying
Vapour passage resistance μ		32000
Formation of skin (~ 20°C/60% UR)		~1 h
Working temperature		>0°C (<0°C without snow/ice)
Storage place		dry, in the original can
Storage period		max. 6 months

Codes and measures

Version	Code	Content (kg)	Box (pc)	Pallet (box)
Tape Liquid	02040700	3,6	1	50

ATTENTION: before laying, verify the compatibility of the substrate with the specific table, which can be downloaded from www.riwega.com
Riwega Srl is not responsible for negligent and improper use of its products