

FDB EXT VSK 350

R3




QUICK OVERVIEW: STRENGTHS

The complete adhesive tape for outdoors

- Breathable adhesive tape
- Outside use
- Ideal for waterproofing the external sill support
- Increased weight for high mechanical strength
- Overplasterable surface

Features:

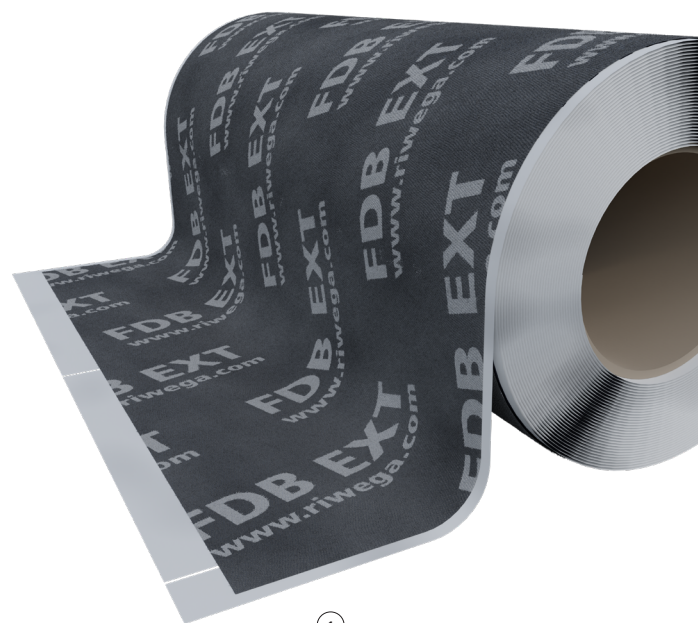

Technical data sheet

Glue		modified polyacrylate
Glue carrier material		PP.PP
Thickness	DIN 53855	0,5 mm
Sd value	EN ISO 12572	0,08 m
Air tightness	EN 1026	$a_n \leq 0,1$
Resistance to water passage	EN 1928	W1
Tensile strength MD/CD*	EN 12311-1	230 / 120 N/50mm
Elongation at break MD/CD*	EN 12311-1	90 / 150 %
Water column		>200 cm
Fire reaction class	EN 13501-1	E
Working temperature		-10°C / +40°C
Temperature resistance		-40°C / +80°C
UV stability		3 months
Storage place		dry, protected from UV rays
Storage period		max. 12 months

Composition:

- Multilayer non-woven PP.PP ①
Acrylic glue with pre-cutted liner ②

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
350	02046135	350 (15+167,5+167,5) x25	1	72

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products