


Tape 2 BU 50

R3

QUICK OVERVIEW: STRENGTHS

The most performing adhesive

- Double-sided butyl tape
- Ideal for attaching membranes to any type of structure
- High performance butyl adhesive with nail sealing properties
- Guarantees seal even in case of movement of the supporting material

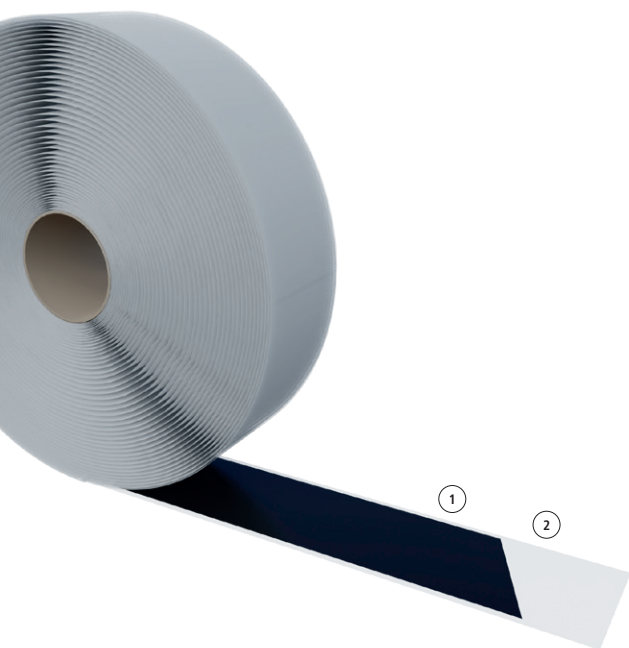

Composition:

- ① Butyl
- ② PE-Liner with Fingerlift (protruding liner)

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Tape 2 BU 50	02040350	50x35	8	30

Features:



Technical data sheet

Glue		butyl
Glue carrier material		-
Protection liner		YES
Thickness		1 mm
Specific weight	DIN EN ISO 1183-1	~1,5 g/cm³
Viscosity (with thickness <2 mm)	DIN EN ISO 7390	npd*
Hardness (Shore 00)	DIN EN ISO 868	npd*
Probe Tack	ASTM D 2979	7.2 N
180° Peel Adhesion	ASTM D 1000	22 N/cm
180° Peel Ad. at 5°C on concrete		20 N/cm
Solid content	DIN EN ISO 10563	100 %
Vertical scrolling	ISO 7390	0 mm
Compressive strength	DTU 39.4	npd*
Emissions	EMICODE®	very low
Working temperature		+0°C / +40°C
Operating temperature		-40°C / +100°C
Ignition temperature	DIN 51794	npd*
Fire class	EN 13501-1	E
Storage place		dry, protected from UV rays, ~20°C
Storage period		max. 12 months