


Coll ALU Elastic

QUICK OVERVIEW: STRENGTHS

The mouldable connection that is not afraid of UV rays

- Mono adhesive butyl tape
- Aluminium surface, up to 60% stretchable
- For sealing angled elements on ventilated façades
- Flexible, handy and easy to customise

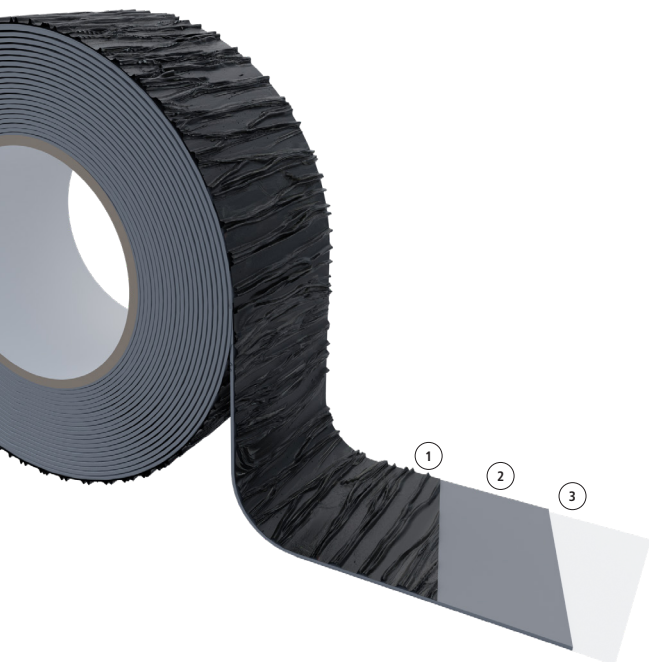

Composition:

- ① 60% stretchable Aluminium film
- ② Butylic glue
- ③ PE film

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Coll ALU Elastic	02044076	80x5	10	80

Features:



Classification:



Technical data sheet

Glue		butyl
Glue carrier material		aluminium foil, up to 60% stretchable
Protection liner		YES
TVOC-test	ISO 16000-6	30 µg/m³
Thickness		1,6 mm
Tensile strength MD/CD**	EN 12311-1	190 / 305 N/50mm
Elongation at break MD/CD**	EN 12311-1	100 / 10 %
Probe tack	ASTM D 2979	9.0 N
180° Peel Adhesion	ASTM D 1000	31 N/cm
Solid content		100 %
Working temperature		+5°C / +40°C
Temperature resistance		-40°C / +100°C
Fire class	EN 13501-1	E
UV stability		high*
Storage place		dry, protected from UV rays, ~20°C
Storage period		max. 12 months

*with reference to the Central European climate

**MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products