

VSK Bitum Reflex 1200 AS


45

R2


QUICK OVERVIEW: STRENGTHS

Self-sealing, self-adhesive waterproof bituminous underlayment with non-slip surface

- Vapour barrier, adhesive on the whole surface
- Ideal on under-ventilated plankings under metal covers
- The perfect solution in combination with USB Drenlam Bluetech
- Increases nail/screw sealing
- Bitumen-based adhesive

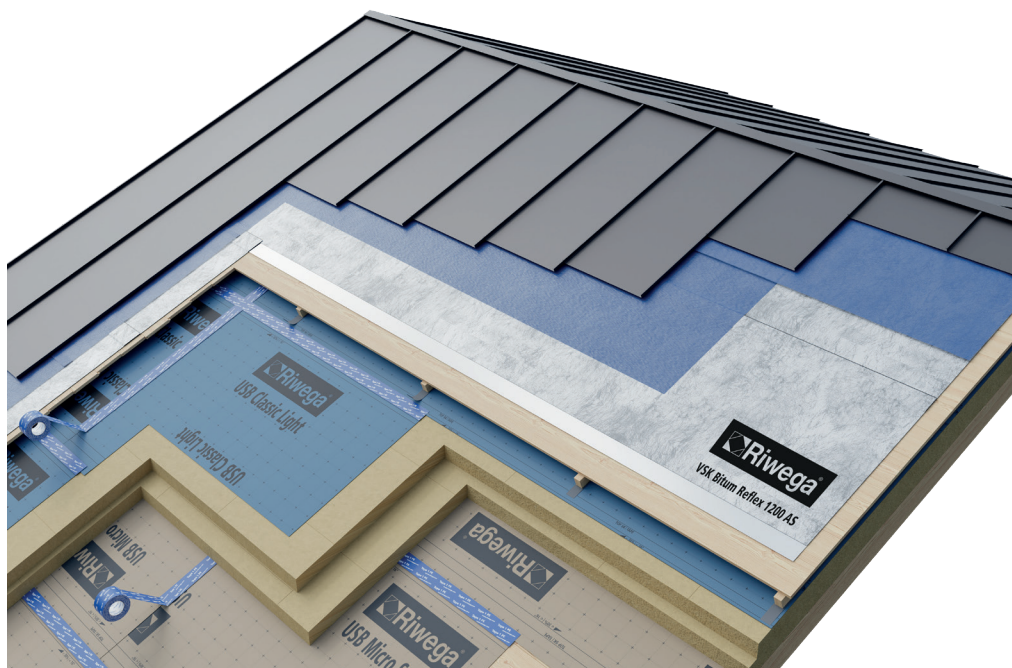

new product

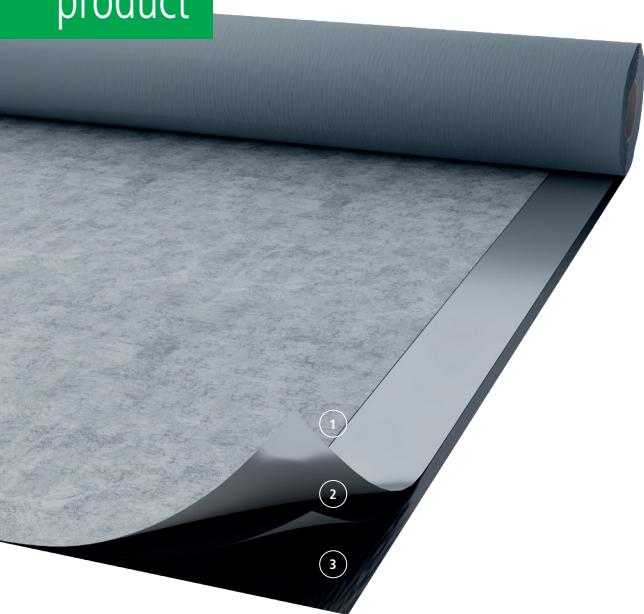

Composition:

- ① Composite aluminium foil with non-slip surface
- ② Self-adhesive modified bitumen
- ③ Silicone liner

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m ²)
02065033	-	1	25	625

Features:



Classification:



Technical data sheet

Material	Self-adhesive bituminous compound	
Finishing	Matt anti-slip aluminum	
Colour	Aluminium grey	
Mass per unit area	EN 1849-1	~ 1200 g/m ²
Thickness	EN 1849-1	1,2 mm
Sd value	EN ISO 12572	>1500 m
Water tightness (≥60kPa)	EN 1928 (Met. A)	passed
Tensile strength MD/CD*	EN 12311-1	220 / 220 N/50mm
Elongation MD/CD*	EN 12311-1	40 / 40 %
Tear resistance MD/CD*	EN 12310-1	180 / 180 N
Resistance to static punching	EN 12730 (Met. A)	15 kg
	EN 12730 (Met. B)	20 kg
Peel strength at the joints	EN 12316-1	35 N/50 mm
Fire reaction class	EN 13501-1	E
Flexibility at low temperatures	EN 1109	-30°C
Working temperature		+0°/+40°C
Temperature resistance		-40°/+80°C
Flow resistance at elevated temp.	EN 1110	≥ +80°C

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products