


VSK Bitum Reflex 1200

46

R2

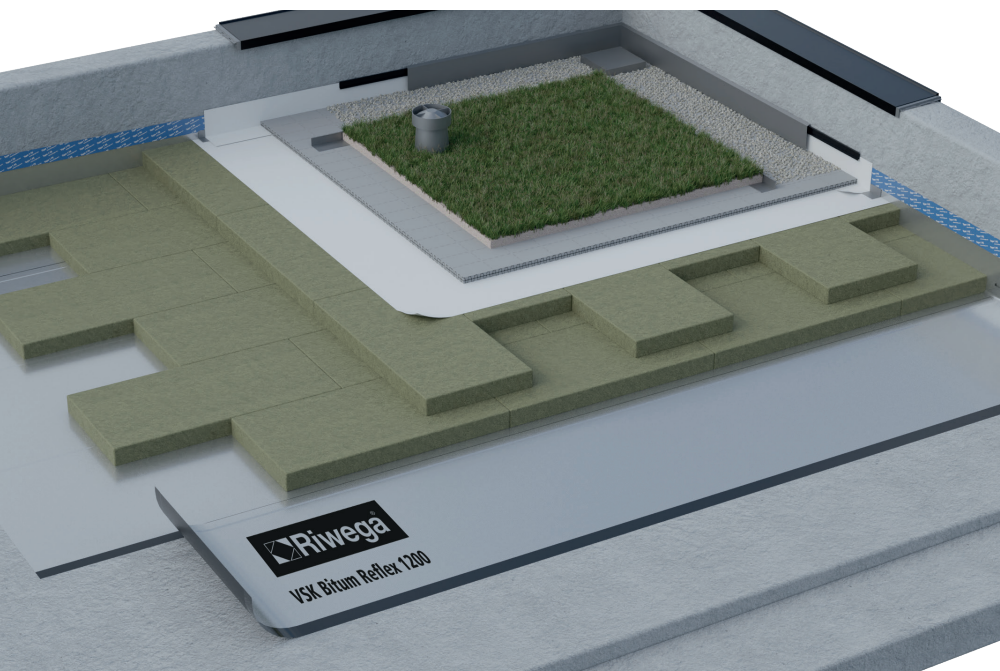

QUICK OVERVIEW: STRENGTHS

Self-adhesive vapour barrier for ceilings and flat roofs


- Vapour barrier, adhesive on the whole surface
- Ideal for installation on flat roofs and concrete ceilings
- Fully vapour impermeable, with reflective surface
- Bitumen-based adhesive

new product

Features:



Classification:

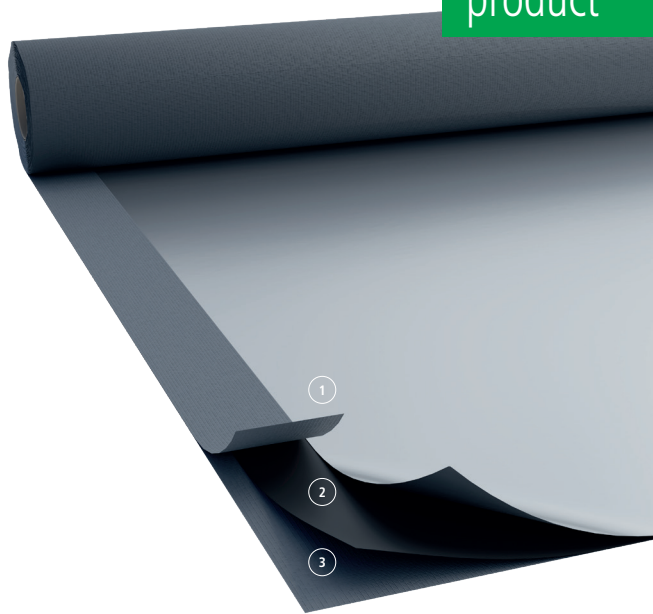

Technical data sheet

Material	Self-adhesive bituminous compound	
Finishing	Composite aluminium foil	
Colour	Reflective aluminium grey	
Mass per unit area	EN 1849-1	~ 1200 g/m ²
Thickness	EN 1849-1	1,2 mm
Sd value	EN 1931	>1500 m
Water tightness (10kPa)	EN 1928 (Met. A)	passed
Tensile strength MD/CD*	EN 12311-1	470 / 320 N/50mm
Elongation MD/CD*	EN 12311-1	3 / 3 %
Tear resistance MD/CD*	EN 12310-1	120 / 120 N
Peel strength at the joints	EN 12317-1	≥250 N/50mm
Straightness	EN 1848-1	<20 mm/10m
Resistance to shock loads	EN 12691	npd**
Fire reaction class	EN 13501-1	E
Flexibility at low temperatures	EN 1109-1	-25°C
Working temperature		≥ +10°C
Flow resistance at elevated temp.	EN 1110	+80°C

Composition:

- Composite aluminium foil (1)
- Self-adhesive modified bitumen (2)
- Silicone liner (3)

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m ²)
02065031	-	1	20	400

**no performance determined

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products