

DS Reflex A2 / 140



51


R2

QUICK OVERVIEW: STRENGTHS

Fire resistant vapour barrier

- Vapour barrier
- Class A2 reaction to fire
- Reflective surface to improve the performance of the insulation package
- Ideal for perfect air-tightness
- Lightweight and easy to install on vertical walls or ceilings

new product

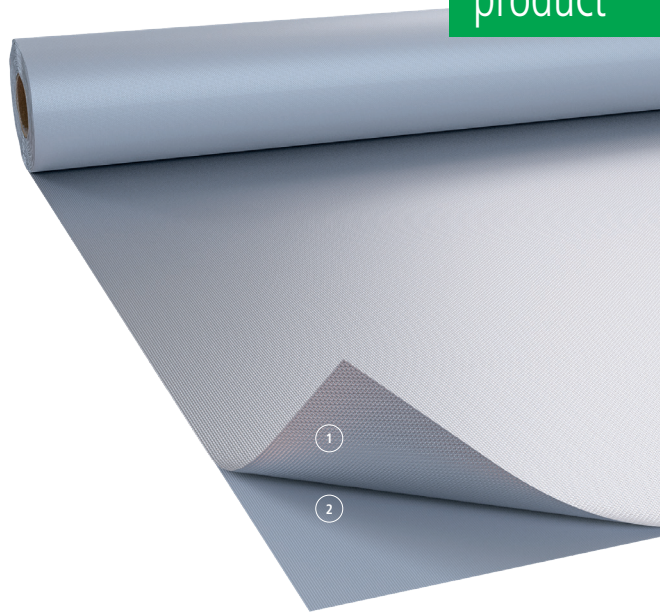

Features:



Classification:



Technical data sheet

Material	fibre glass fabric and pure aluminium	
Colour	aluminium	
Mass per unit area	EN 1849-2	140 g/m ²
Thickness		0,10 mm
Sd value	EN ISO 12572	>2500 m
Water vapour permeability	EN ISO 12572	~ 0,01 g/m ² /24 h
Water tightness	EN 13984	passed
Tensile strength MD/CD*	EN 12311-1	1300 / 1200 N/50mm
Elongation MD/CD*	EN 12311-1	2,6 / 3,5 %
Tear resistance MD/CD*	EN 12310-1	143 / 144 N
Fire reaction class	EN 13501-1	A2-s1,d0
Temperature resistance		-40°/+100°C

Composition:

- Aluminium film ①
- Fibre glass ②

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m ²)
02010345	-	1,2	50	3840

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products