

Temporary rain sheets


52

R2

QUICK OVERVIEW: STRENGTHS

The essential protection for your working site

- Temporary rain sheet
- Temporary protection during working phases
- Waterproof element for emergencies
- High tearing resistance thanks to reinforcement stripes
- Available in RAPID version which is provided with a central hook for a quicker positioning

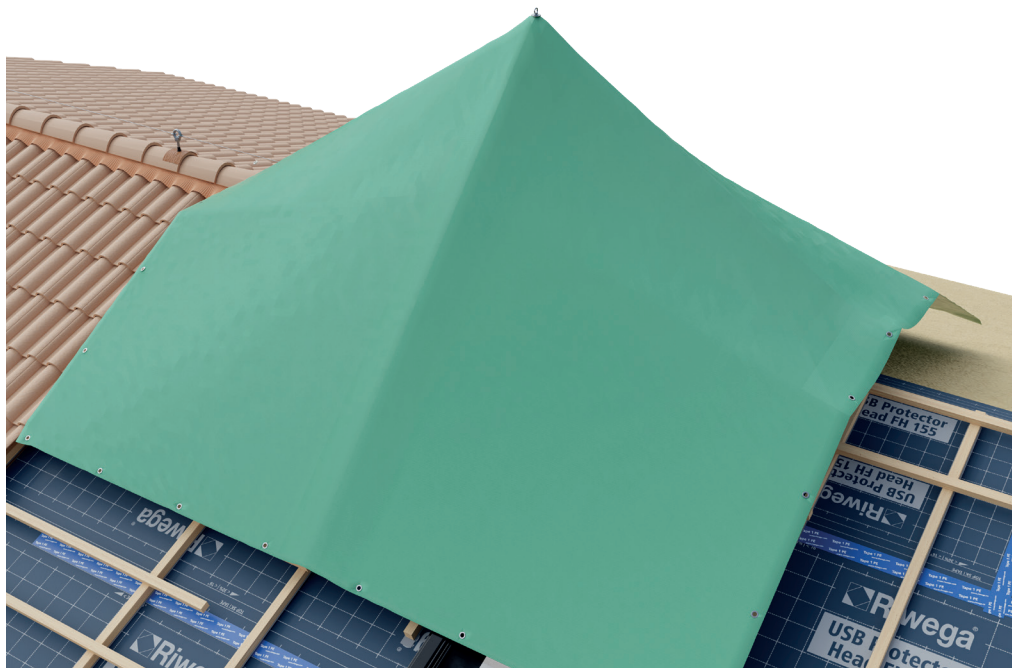

Composition:

- ① PE layer
- ② Metal grommet

Codes and measures

Version	Code	Width (m)	Length (m)	Pallet (m ²)
RAPID	02070001	15	15	-
Standard	02070002	6	10	-
Standard	02070003	8	10	-
Standard	02070004	10	12	-

Technical data sheet - Temporary rain sheet RAPID

Material	PE	
Colour	Green	
Mass per unit area		200 g/m ²
Mass per unit area reinforced PE		220 g/m ²
Water tightness		passed
Tensile strength (layer)		1000 N (~ 100 kg)
Tensile strength (reinforcing stripes)		2100 N (~ 210 kg)
Perimetral reinforcement		~ 5 cm
Perimetral grommets distance		grommets' ø 12 mm (each 1 m)
Coating		on both sides
UV stability		stabile
Temperature resistance		-40°/+80°C