


Windtop UV Fire B 50/210

R2


QUICK OVERVIEW: STRENGTHS

Maximum protection with joints up to 50 mm

- Breathable waterproofing membrane for ventilated facades
- Ideal membrane for waterproof and wind-tight ventilated facades with open joints
- UV resistance for joints up to 50 mm
- Increased mass per unit area for improved mechanical resistance

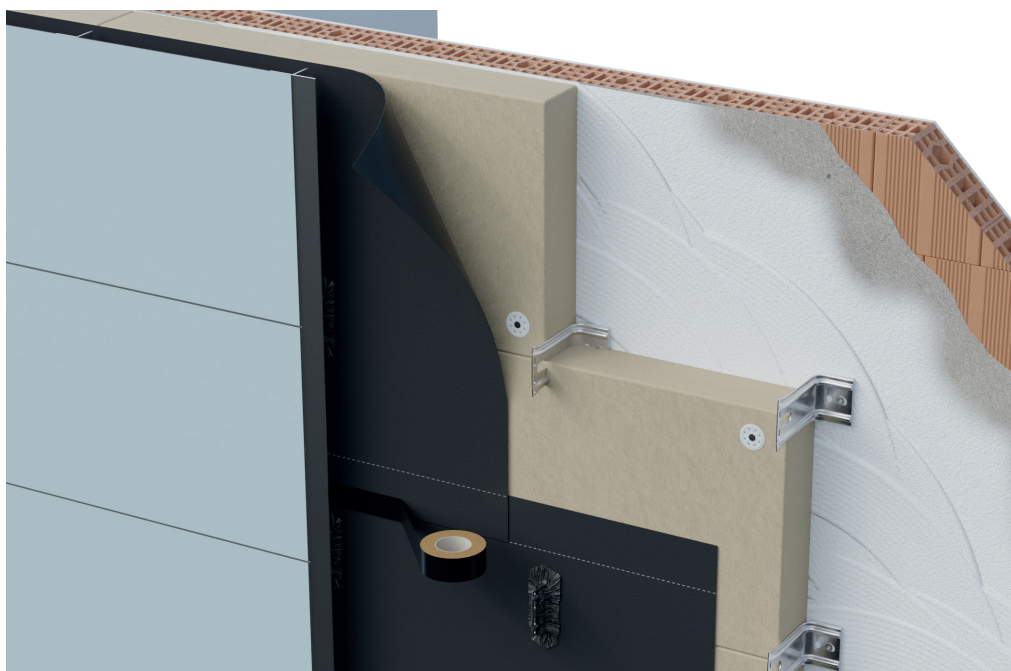

new product

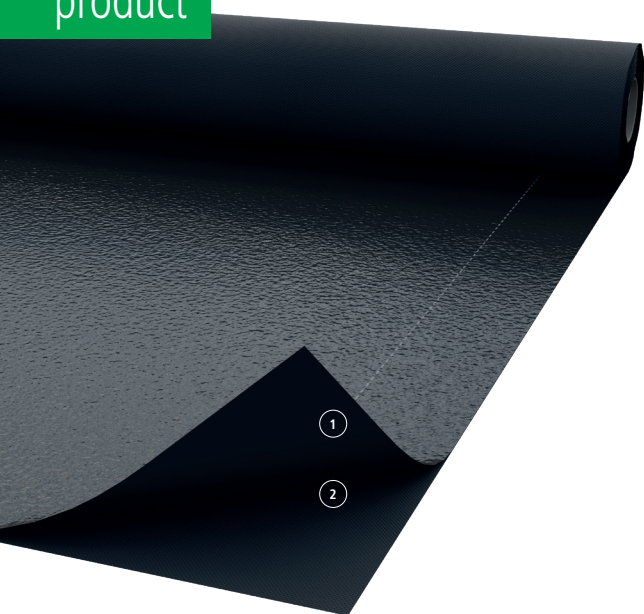

Composition:

- ① UV stable PUR functional film
- ② Protective layer in PET

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m ²)
02010300	02020307	1,5	50	1500
020103000	-	3,0	30	1800

Features:



Classification:



Technical data sheet

Material	PET.PU	
Film	Functional coating	
Colour	Black	
Use underneath PV panels	NO	
Mass per unit area	EN 1849-2	210 g/m ²
Thickness		0,61 mm
Sd value	EN ISO 12572	0,1 m
Water vapour permeability	EN ISO 12572	~ 200 g/m ² /24 h
Watern column	EN 20811	>300 cm
Heavy rain test	TU Berlin	npd**
Resistance to water passage	EN 1928 (Met. A)	W1
Tensile strength MD/CD*	EN 12311-1	380 / 420 N/50mm
Elongation MD/CD*	EN 12311-1	40 / 55 %
Tear resistance MD/CD*	EN 12310-1	220 / 210 N
Fire reaction class	EN 13501-1	B-s1,d2
UV stability	stable (joints up to max. 50 mm - max. 40 %)	
Weathering without final cladding		6 months
Temperature resistance		-40°/+80°C

*MD = longitudinal CD = transversal

**no performance determined

Riwega Srl is not responsible for negligent and improper use of its products