

Windtop UV 30/160



QUICK OVERVIEW: STRENGTHS


Protection that doesn't fear UV rays

- Waterproof breathable membrane
- The special polyurethane coating makes it particularly practical and resistant to UV rays
- Ideal membrane for water-proof and wind-tight thermal insulation in ventilated facades with open joints
- Black color for a low aesthetical impact

Features:



Classification:

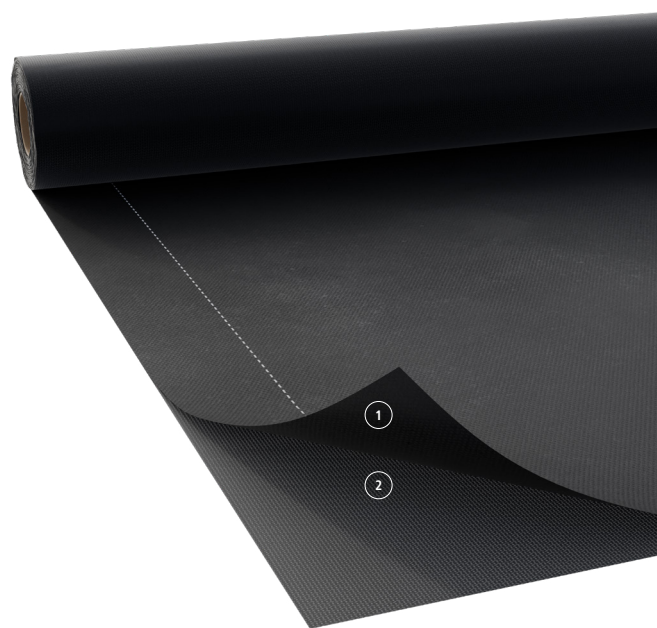

Technical data sheet

Mass per unit area	EN 1849-2	160 g/m ²
Thickness		0,50 mm
S _d value	EN ISO 12572	0,14 m
Water vapour permeability	EN ISO 12572	~ 200 g/m ² /24 h
Air permeability	EN 12114	<0,004 m ³ /(m ² h 50Pa)
Watern column	EN 20811	>200 cm
Heavy rain test	TU Berlin	passed
Resistance to water passage	EN 1928 (Met. A)	W1
Tensile strength MD/CD*	EN 12311-1	300 / 170 N/50mm
Elongation MD/CD*	EN 12311-1	25 / 30 %
Tear resistance MD/CD*	EN 12310-1	130 / 160 N
Fire reaction class	EN 13501-1	E
UV stability	stable (joints up to max. 30 mm - max. 40 %)	
Weathering without final cladding		4 months
Temperature resistance		-40°C / +100°C

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products

Composition:

UV stable PUR functional film ①

Protective layer in PET ②

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m ²)
02010301	02020301	1,5	50	1500