

Euro-ROLL



QUICK OVERVIEW: STRENGTHS

The strength is the price

- Under-ridge roll
- Resistant to water infiltrations and UV rays
- Easily adaptable to every type of roof covering
- Pre-folded Alu edge to increase the mechanical resistance
- Blocks access to birds and rodents under the roof tiles

Features:




Technical data sheet

Material		alu.PP.alu
Pre-folded edge		NO
Aluminium stripe		0,12 mm
Roll length		5,00 m
Central fabric		polypropylene
Central stripe		NO
Material assembly		glue and seam
Extruded butylic glue		90 g/m
Air flow (each side)	DIN 4108-3	>145 cm ² /m
Temperature resistance		-30°C / +70°C
Processing temperature		+5°C / +40°C
Alu development		1,25 %
Storage		dry, protected from UV rays, max. +30°C
Packaging		4 pc/box
Pallet		30 boxes

Codes and measures

Colours / Measures	310 mm	370 mm	400 mm
Red-brown	01013903	01013901	01013906
Brown	01013904	01013902	01013907
Black	01013905	-	-

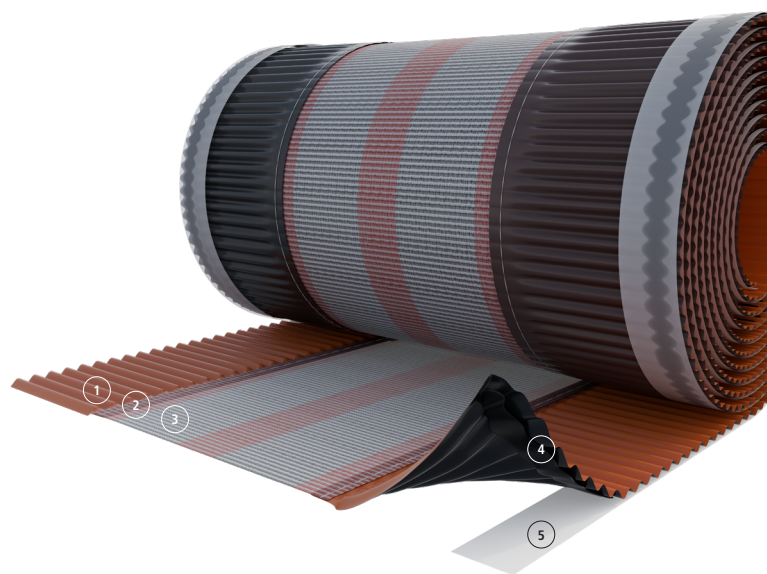

Composition:

Aluminium ①

Seam ②

PP fabric ③

Extruded butylic glue ④

Silicon liner ⑤