


DO 155

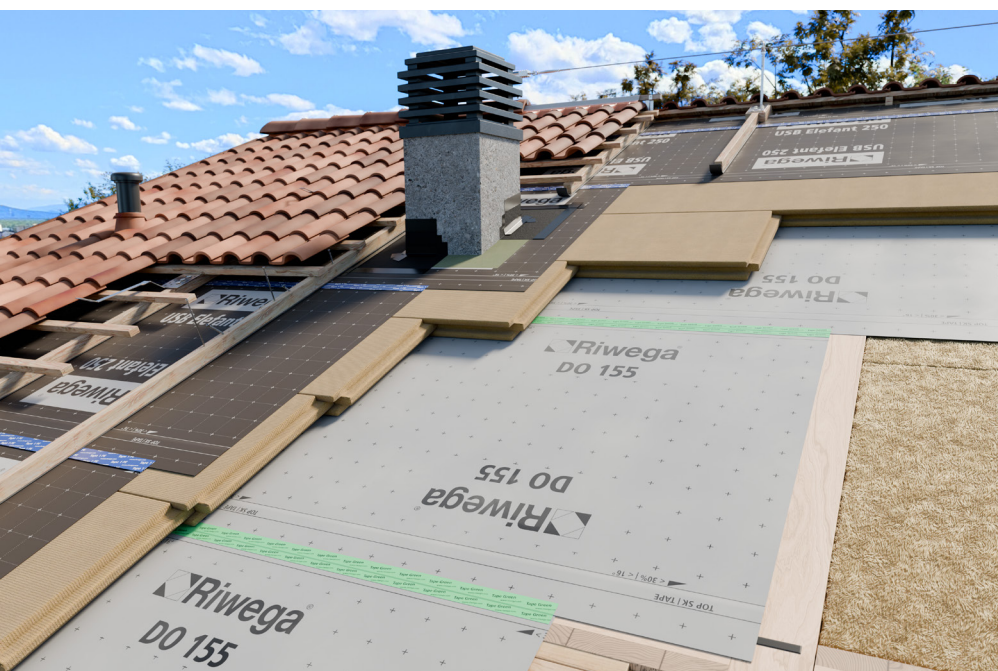

QUICK OVERVIEW: STRENGTHS


The 100% PP solution with low grammage

- Highly breathable, water-tight membrane
- Light membrane for roofs and resistant membrane for walls, perfect for wind-tightening of ventilated facades
- High tearing resistance
- The non-slip surface allows easy laying
- 100% in completely recyclable polypropylene

Features:



Classification:

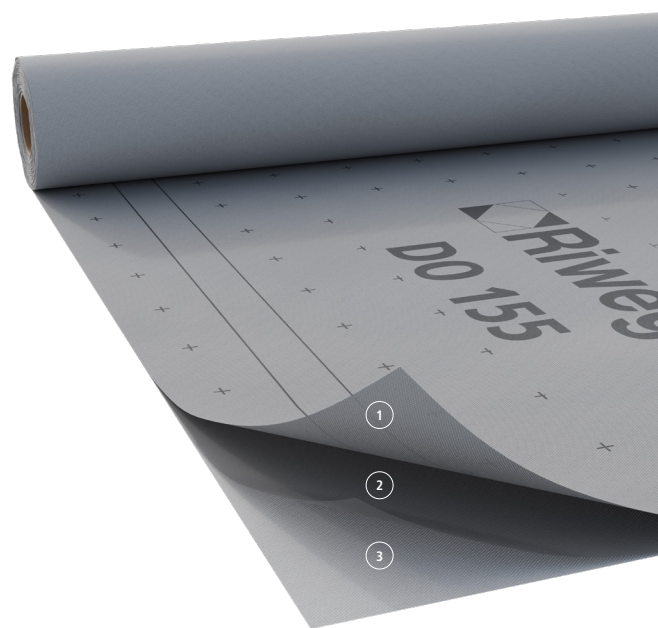

Composition:

- Protective UV stabilized, water repellent layer in PP ①
- Microporous film in PP ②
- Protective layer in PP ③

Technical data sheet

Mass per unit area	EN 1849-2	155 g/m ²
Thickness		0,60 mm
S _d value	EN ISO 12572	0,02 m
Water vapour permeability	EN ISO 12572	~ 1000 g/m ² /24 h
Watert column	EN 20811	>200 cm
Heavy rain test	TU Berlin	passed
Resistance to water passage	EN 1928 (Met. A)	W1
Tensile strength MD/CD*	EN 12311-1	350 / 260 N/50mm
Elongation MD/CD*	EN 12311-1	60 / 80 %
Tear resistance MD/CD*	EN 12310-1	200 / 225 N
Fire reaction class	EN 13501-1	E
UV stability		3 months
Temperature resistance		-40°C / +90°C

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m ²)
02010190	02020312	1,5	50	1500