

USB Classic Light


11

R2

QUICK OVERVIEW: STRENGTHS

The lightest for the roof, the most resistant for the wall

- Highly breathable, water-tight membrane
- Optimised performance, guaranteed for 20 years thanks to the UV10 Bikom film
- Ideal for wind-tightness of ventilated facades with closed joints
- Recommended for roofs with a roof pitch over 30%
- Non-slip and non-reflective surface

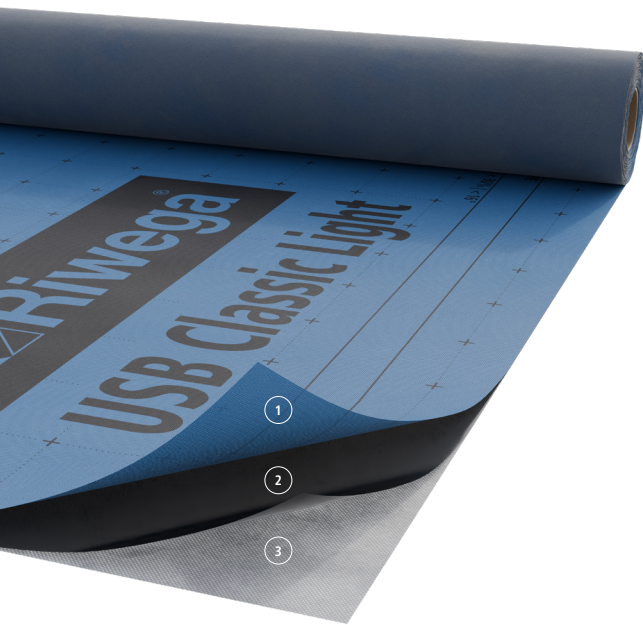

Composition:

- ① Protective UV stabilized, water repellent layer in PP
- ② Film UV10 Bikom, monolithic, elastic
- ③ Protective layer in PP

Codes and measures

Code	Code TOP SK	Width (m)**	Length (m)	Pallet (m ²)
02010140	020201501	1,5	50	1500

Features:



Classification:



Technical data sheet

Mass per unit area	EN 1849-2	155 g/m ²
Thickness		0,75 mm
S _d value	EN ISO 12572	0,07 m
Water vapour permeability	EN ISO 12572	~ 500 g/m ² /24 h
Water column	EN 20811	>400 cm
Heavy rain test	TU Berlin	passed
Resistance to water passage	EN 1928 (Met. A)	W1
Tensile strength MD/CD*	EN 12311-1	290 / 225 N/50mm
Elongation MD/CD*	EN 12311-1	65 / 90 %
Tear resistance MD/CD*	EN 12310-1	170 / 200 N
Fire reaction class	EN 13501-1	E
UV stability		6 months
Temperature resistance		-40°C / +100°C

*MD = longitudinal CD = transversal

**3 m version upon request

Riwega Srl is not responsible for negligent and improper use of its products