


USB Drenlam Diff TOP SK

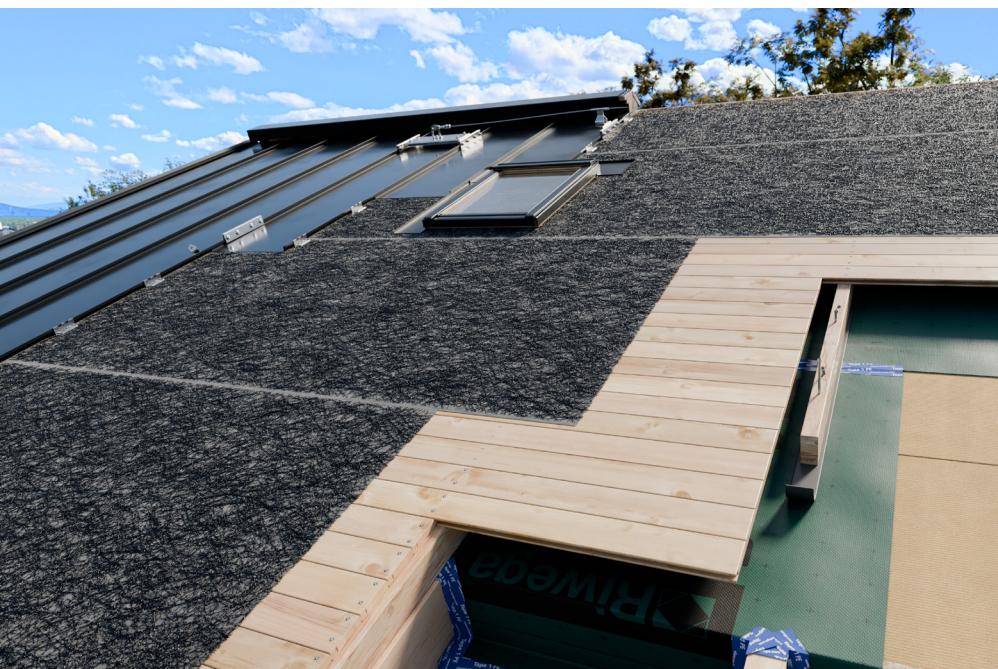

QUICK OVERVIEW: STRENGTHS

Stops noise and condensation

- Separation layer for metal roofs
- Unique because of the double integrated adhesive tape (TOP SK)
- Guarantees an optimal micro ventilation for the evacuation of condensation
- 100% virgin PP (non-recycled) for guaranteed extended durability

Features:



Classification:




Technical data sheet

Mass per unit area	EN 1849-2	500 (150+350) g/m ²
Thickness		8,75 (0,75+8) mm
S _d value	EN ISO 12572	0,02 m
Water vapour permeability	EN ISO 12572	~ 1000 g/m ² /24 h
Watern column	EN 20811	>200 cm
Heavy rain test	TU Berlin	passed
Resistance to water passage	EN 1928 (Met. A)	W1
Tensile strength MD/CD*	EN 12311-1	300 / 190 N/50mm
Elongation MD/CD*	EN 12311-1	60 / 70 %
Tear resistance MD/CD*	EN 12310-1	150 / 190 N
Void ratio		min. 95 %
Noise reduction	EN ISO 712-2	ΔLW 28 dB
Fire reaction class	EN 13501-1	E
UV stability		3 months
Temperature resistance		-40°C / +90°C

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products

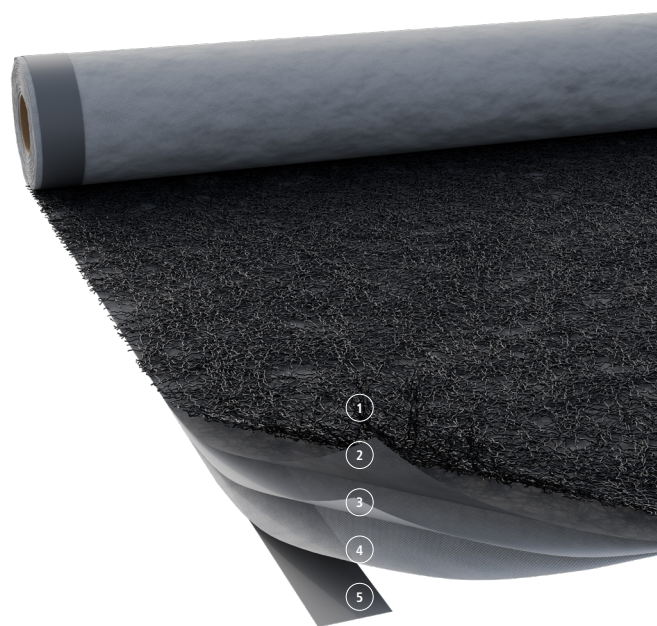

Composition:

- Three-dimensional netting in PP with carbon black ①
- Protective UV stabilized, water repellent layer in PP ②
- Functional film in PP ③
- Protective layer in PP with integrated adhesive tape ④
- Silicone liner ⑤

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m ²)
-	02064011	1,5	24	324