

USB Micro

31

R2

QUICK OVERVIEW: STRENGTHS

The first, the original

- Vapour control layer
- Regulates the passage of vapour
- High mechanical resistance
- Ideal also as a temporary waterproofing system during the different working phases on the working site
- More than 25 years of history in the market
- Great quality/price ratio



Composition:

- ① Protective UV stabilized, water repellent layer in PP
- ② Functional film in PP
- ③ Protective layer in PP


Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m ²)
02030140	02020141	1,5	50	1500
020301400	-	3,0	50	3000

Features:



Classification:

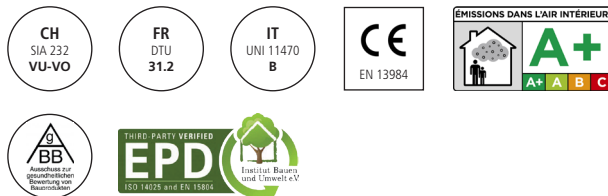

Technical data sheet

Mass per unit area	EN 1849-2	155 g/m ²
Thickness		0,78 mm
S _d value	EN ISO 12572	2 m
Water vapour permeability	EN ISO 12572	~ 15 g/m ² /24 h
Water column	EN 20811	>550 cm
Water tightness	EN 13984	passed
Tensile strength MD/CD*	EN 12311-1	310 / 240 N/50mm
Elongation MD/CD*	EN 12311-1	70 / 80 %
Tear resistance MD/CD*	EN 12310-1	190 / 230 N
Fire reaction class	EN 13501-1	E
Emissions	CMR regulation	A+
	AgBB-scheme 2018	YES
UV stability		4 months
Temperature resistance		-40°C / +100°C

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products