


# USB Wall 120

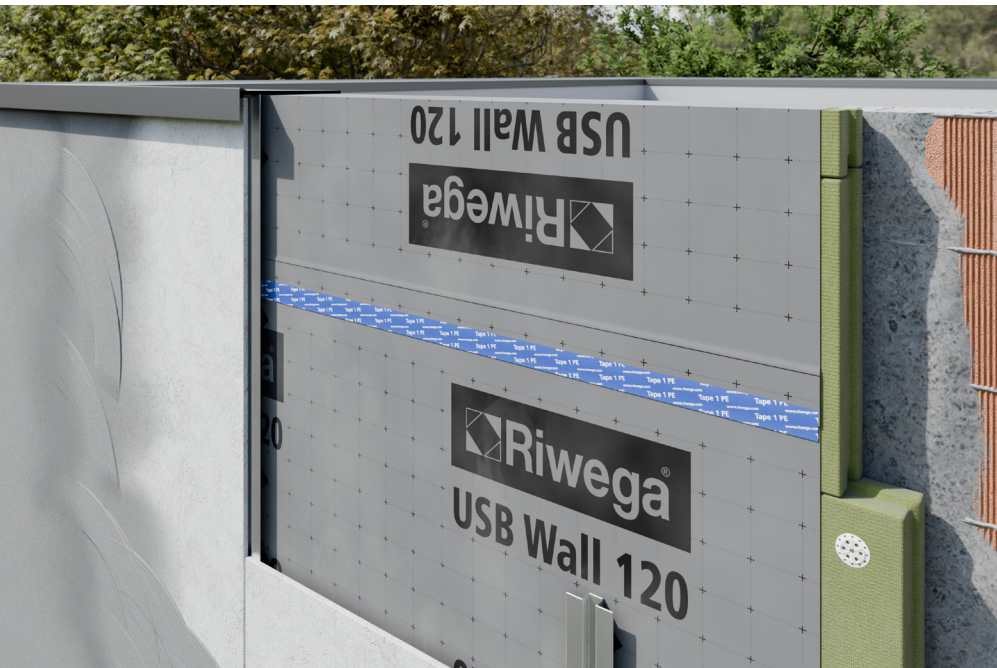

## QUICK OVERVIEW: STRENGTHS



The essential membrane for ventilated facades with continuous cladding

- Highly breathable, water-tight membrane
- Guarantees wind-tightness of the insulation of ventilated facades with continuous cladding
- Available in 3m height to speed up laying time
- Made of 100% recyclable polypropylene

### Features:



### Classification:

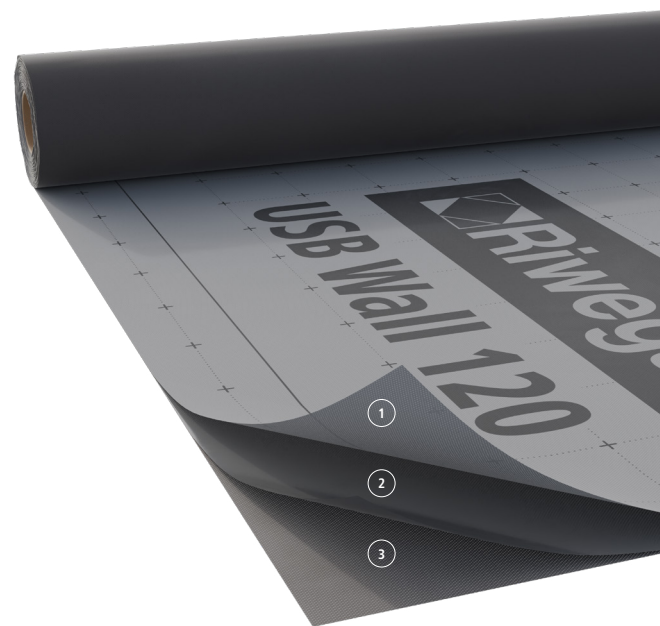

### Technical data sheet

Mass per unit area	EN 1849-2	120 g/m <sup>2</sup>
Thickness		0,65 mm
S <sub>d</sub> value	EN ISO 12572	0,02 m
Water vapour permeability	EN ISO 12572	~ 1000 g/m <sup>2</sup> /24 h
Air permeability	EN 12114	<0,009 m <sup>3</sup> /(m <sup>2</sup> h 50Pa)
Water column	EN 20811	>200 cm
Heavy rain test	TU Berlin	passed
Resistance to water passage	EN 1928 (Met. A)	W1
Tensile strength MD/CD*	EN 12311-1	260 / 155 N/50mm
Elongation MD/CD*	EN 12311-1	60 / 70 %
Tear resistance MD/CD*	EN 12310-1	105 / 140 N
Fire reaction class	EN 13501-1	E
UV stability		3 months
Temperature resistance		-40°C / +100°C

### Composition:

- Protective UV stabilized, water repellent layer in PP ①
- Functional film in PP ②
- Protective layer in PP ③

### Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m <sup>2</sup> )
02010090	02020121	1,5	50	1500
020100900	-	3,0	50	3000

\*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products