

# FDB EXT VSK 350 FL



## QUICK OVERVIEW: STRENGTHS


### The complete adhesive tape for outdoors

- Breathable adhesive tape
- Outside use
- Ideal for waterproofing the external sill support
- Increased weight for high mechanical strength
- Overplasterable surface

#### Features:



#### Classification:

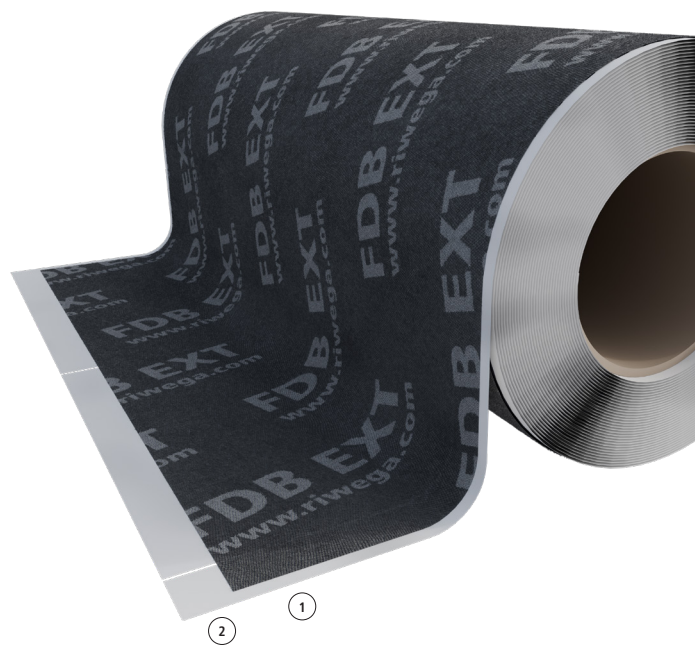

#### Composition:

- Multilayer non-woven PP.PP (1)
- Acrylic glue with pre-cutted liner (2)

#### Technical data sheet

Glue		acrylic with Fingerlift
Glue carrier material		PP.PP
Thickness	DIN 53855	0,5 mm
S <sub>d</sub> value	EN ISO 12572	0,05 m
Air tightness	EN 1026	a <sub>n</sub> ≤0,1
Resistance to water passage	EN 1928	W1
Tensile strength MD/CD*	EN 12311-1	250 / 120 N/50mm
Elongation at break MD/CD*	EN 12311-1	90 / 150 %
Water column		>200 cm
Fire reaction class	EN 13501-1	E
Working temperature		-10°C / +40°C
Temperature resistance		-40°C / +80°C
UV stability		3 months
Storage place		dry, protected from UV rays
Storage period		max. 12 months

#### Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
350	02046135	350 (15+167,5+167,5) x25	1	72

\*MD = longitudinal CD = transversal  
Riwega Srl is not responsible for negligent and improper use of its products