

Tape 2 CO



QUICK OVERVIEW: STRENGTHS

The ideal connection sealant for wooden houses


- Butyl adhesive cord
- Its conformation makes it perfect for sealing between wood surfaces
- Guarantees the adhesive seal even in the event of movement of the support material
- Characterized by butyl glue with a high seal and free of solvents

Features:



Technical data sheet

Glue		butyl
Protection liner		YES
Diameter of the cord		6 mm
Specific weight	DIN EN ISO 1183-1	~1,6 g/cm³
Viscosity	DIN EN ISO 7390	stable
Hardness (Shore 00)	DIN EN ISO 868	~40
Compressive strength	DTU 39.4	>0,05 N/mm²
Solid content	DIN EN ISO 10563	>99 %
Emissions	EMICODE®	very low
Working temperature		+5°C / +30°C
Operating temperature		-40°/+100°C (for short times max. +180°C)
Ignition temperature	DIN 51794	>400°C
Fire class	DIN 4102	B2
Storage place		dry, protected from UV rays, ~20°C
Storage period		max. 12 months

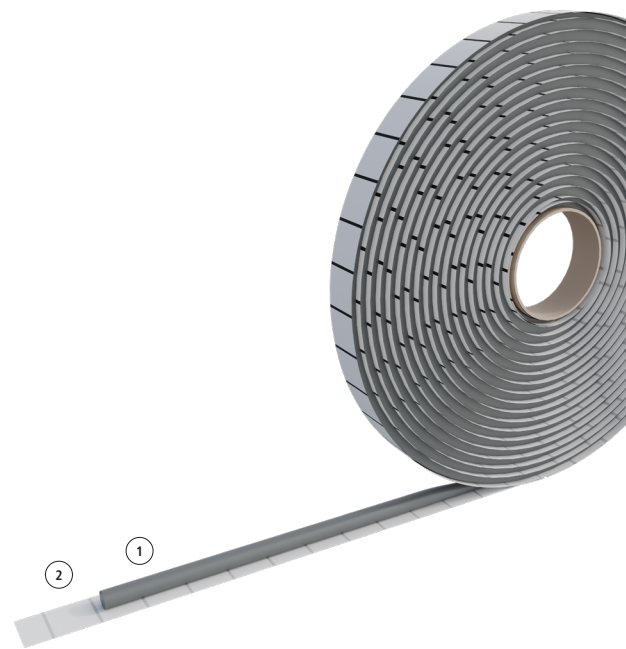

Composition:

- Butyl cord (1)
Silicone liner (2)

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Tape 2 CO	02040306	6x7	22	30