


# Tape Green

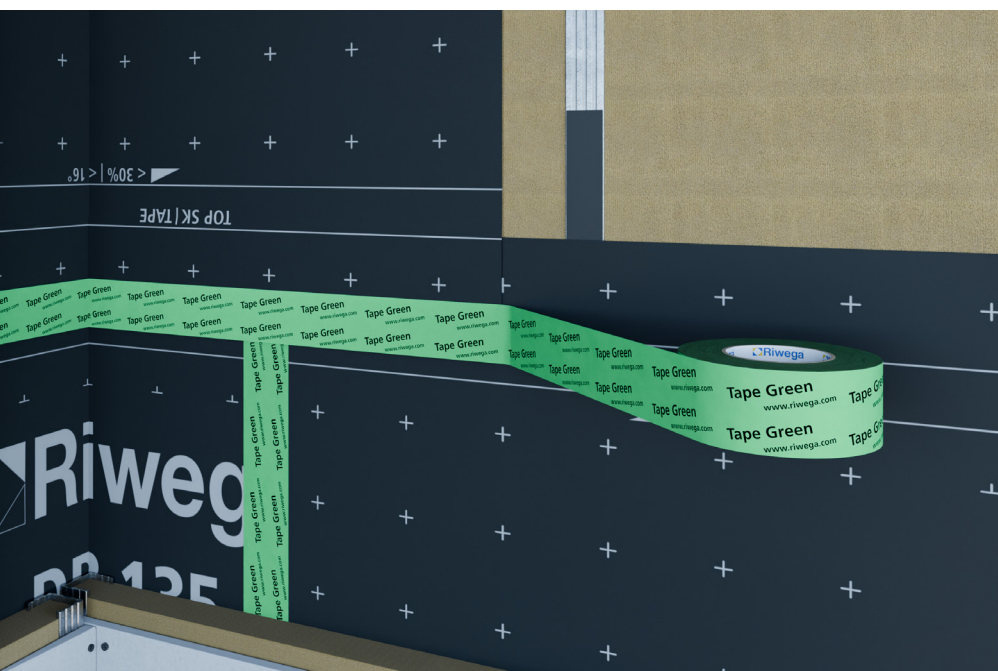

## QUICK OVERVIEW: STRENGTHS

### The essence of sealing

- Single-sided acrylic tape
- Excellent quality/price ratio
- Perfect for sealing any interruption of vapour control layers and wooden surfaces
- Dual use, internal and exterior, thanks to the waterproof surface
- High adhesion acrylic glue, solvent-free

### Features:



### Classification:




### Technical data sheet

Glue		pure polyacrylate
Glue carrier material		film in PE
Reinforcing mesh		YES
Protection liner		YES
Solvents and emollients		NO
Thickness	DIN EN 1942	~0,28 mm
S <sub>d</sub> value		~40 m
Tear resistance with elasticity	DIN EN 14410	≥22 N/10 mm; 586 %
Bond strength	DIN 4108-11	compliant
Resistance to condensation		high
Initial adhesion (Tack)		high
Emissions	EMICODE®	EC1 <sup>PLUS</sup>
Working temperature		+5°C / +30°C
Temperature resistance		-40°C / +80°C
UV stability		12 months*
Storage place		dry, protected from UV rays, +18°C / +25°C
Storage period		max. 24 months

\*with reference to the Central European climate

\*\*pre-cutted silicone liner in Tape Green 100 X (50+50 mm)

Riwega Srl is not responsible for negligent and improper use of its products

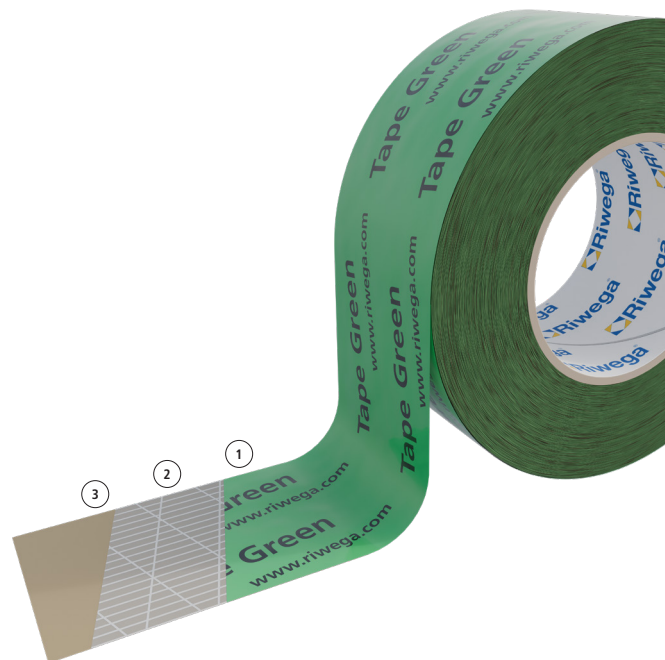

### Composition:

Polyethylene ①

Acrylic glue with PET reinforcing ②

Silicone liner\*\* ③

### Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Tape Green	02040161	50x25	12	85
Tape Green 60	02040166	60x25	10	85
Tape Green 100 X	02040160	100 (50+50) x25	6	42
Tape Green Industry	02040165	60x50	16	36