


Tape Strong

02

R3

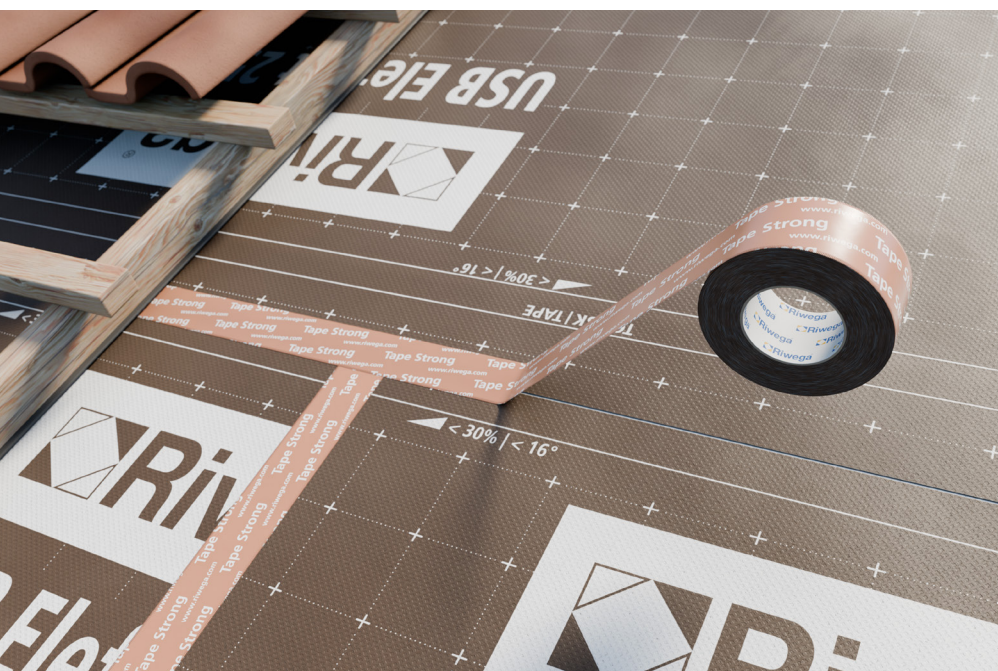

QUICK OVERVIEW: STRENGTHS


Nondeformable with easy tearing

- Single-sided acrylic tape
- The particular rigidity reduces excessive deflections
- Next-generation acrylic glue, high adhesion, solvent-free
- Dual use, internal and exterior, thanks to the waterproof surface
- The tooothing on the sides makes it easily tearable by hand

Features:



Classification:

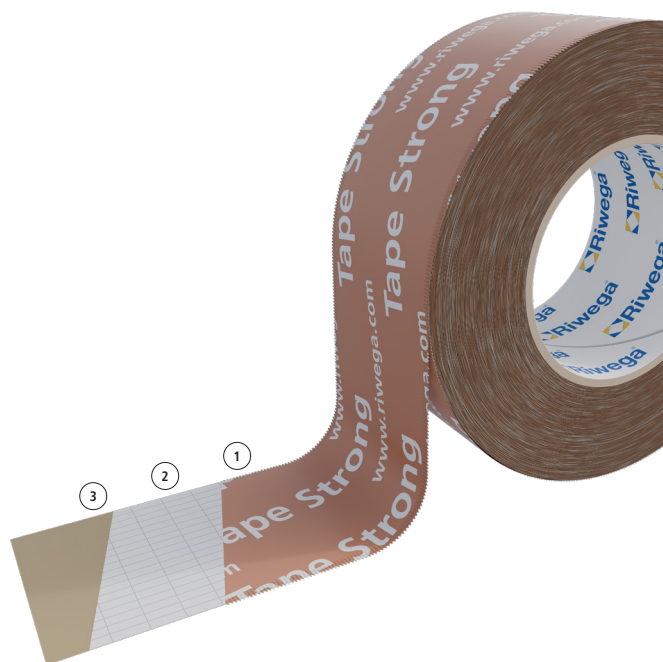

Technical data sheet

Glue		polyacrylate-based disp.
Glue carrier material		PP film
Reinforcing mesh		YES
Protection liner		YES
Solvents and emollients		NO
Thickness	DIN EN 1942	0,30 - 0,32 mm
S _d value		~16 m
Tear resistance with elasticity	DIN EN 14410	≥60 N/25 mm; 450 %
Bond strength	DIN 4108-11	compliant
Resistance to condensation		very high
Resistance to aging		very high
Initial adhesion (Tack)		very high
Emissions	EMICODE®	EC1 ^{PLUS}
Working temperature		+5°C / +30°C
Temperature resistance		-30°C / +100°C
UV stability		24 months*
Storage place		dry, protected from UV rays, +18°C / +25°C
Storage period		max. 24 months

*with reference to the Central European climate

**pre-cutted silicone liner in Tape Strong 12/48 variant (12+48 mm) and Tape Strong 200 X (100+100 mm)

Riwega Srl is not responsible for negligent and improper use of its products

Composition:

Polypropylene ①

Acrylic glue with PET reinforcing ②

Silicone liner** ③

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Tape Strong	02040170	60x25	10	80
Tape Strong 12/48	020401701	60 (12+48) x25	10	80
Tape Strong 200 X	02040172	200 (100+100) x25	2	80