


# Tip KONT

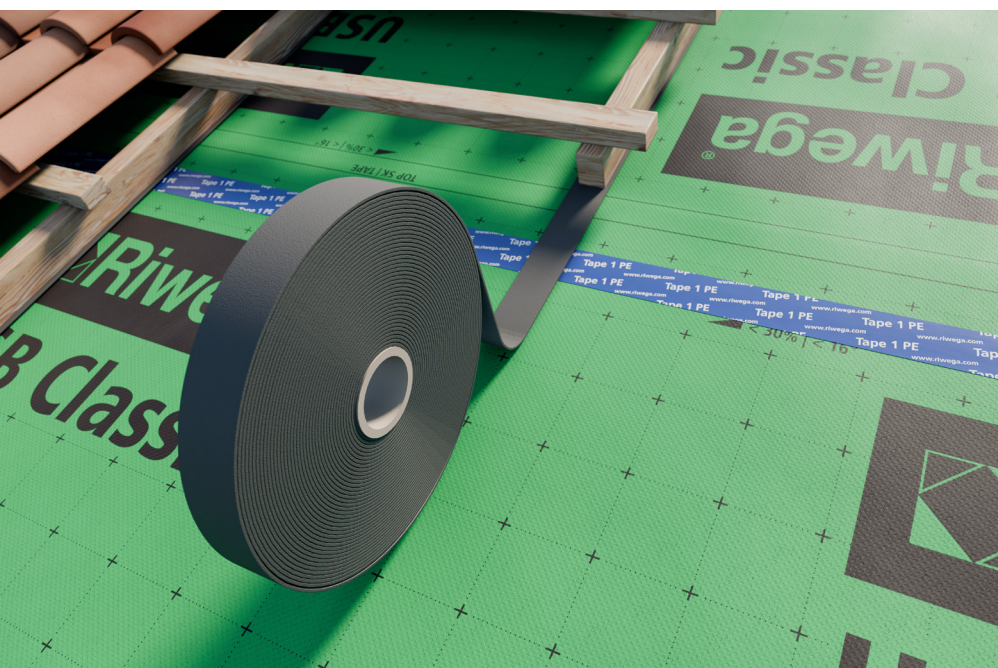

## QUICK OVERVIEW: STRENGTHS

### The continuous nail sealing tape

- Single-sided adhesive nail sealing tape
- Guarantees air-, wind- and water tightness of the breathable membranes
- Thanks to its high elasticity it is resistant to dilations and vibrations
- Wall and roof application

#### Features:




#### Classification:



#### Technical data sheet

Material		PE foam
Glue		acrylic
Protection liner		NO
Thickness		3 mm
Specific weight		25 / 30 kg/m <sup>3</sup>
Peel adhesion	DIN EN 1939	≥5 N/25 mm
Shear strength	DIN EN 1943	500 g/625mm <sup>2</sup>
Working temperature		+10°C / +30°C
Temperature resistance		-30°C / +80°C
Resistance to condensation		high
Resistance to aging		limited
UV stability		limited
Storage place		dry, protected from UV rays
Storage period		max. 24 months

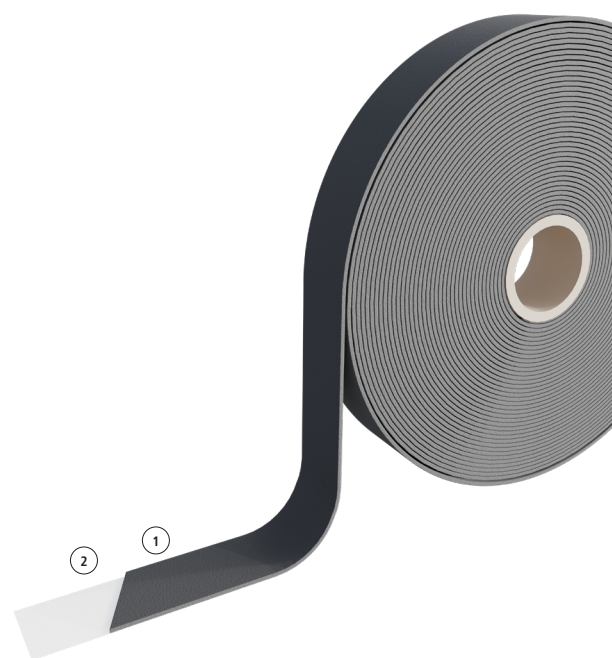

#### Composition:

- PE foam ①  
Acrylic glue ②

#### Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Tip KONT 60	02045001	60x30	10	18
Tip KONT 70	020450017	70x30	9	18
Tip KONT 80	02045003	80x30	7	18