

Coll Radon


18

R3


QUICK OVERVIEW: STRENGTHS

The invincible against radon

- Mono adhesive butyl tape
- Certified solution, ideal for sealing radon gas barriers
- Can be applied "cold", a simple and quick application
- Pre-cut liner for easy corner sealing
- Ideal for creating hermetic and durable connections on various surfaces

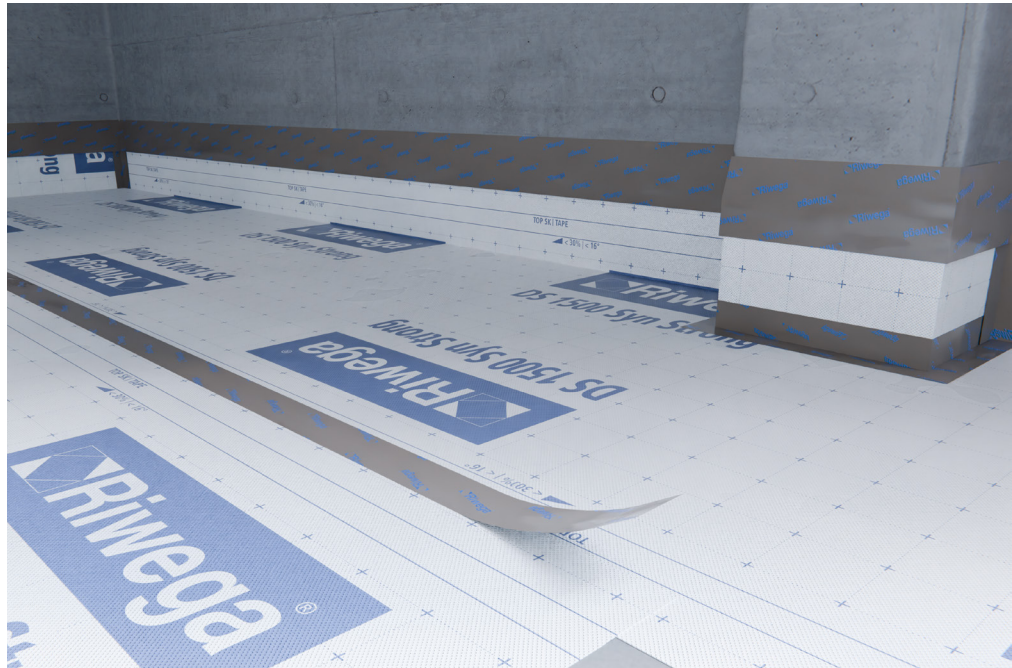

new
product

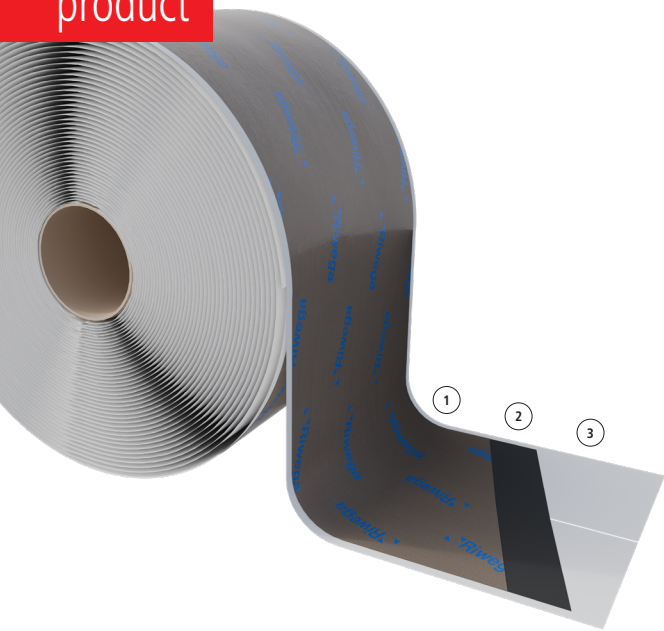

Composition:

- ① Aluminium film
- ② Butylic glue
- ③ Half pre-cut silicone liner

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Coll Radon 75	020445022	75x15	12	-
Coll Radon 150	020445021	150x15	1	-

Features:



Technical data sheet

Glue		butyl
Glue carrier material		alu film
Protection liner		YES
Thickness Glue (d)		1,0 mm
Thickness Glue carrier material		0,1 mm
Butyl specific weight	DIN EN ISO 10563	~1,5 g/cm ³
Solid content	DIN EN ISO 10563	>99 %
Bitumen compatibility		YES
Working temperature		+5°C / +30°C
Temperature resistance		-40°C / +100°C
UV stability		high*
Radon gas diffusion (D)	ISO/TS 11665-13	1,6 x 10 ⁻¹³ m ² s ⁻¹
Diffusion length (L _p)	ISO/TS 11665-13	0,26 mm
Test parameter (R=d/L _p)	ISO/TS 11665-13	3,79
Storage place		dry, protected from UV rays, ~20°C
Storage period		max. 12 months

*with reference to the Central European climate
Riwega Srl is not responsible for negligent and improper use of its products