


USB Welding Start

R2

QUICK OVERVIEW: STRENGTHS

The airtight, UV-resistant eaves membrane

- Eaves ventilation accessory with UV-resistant PVC strip
- Weldable to the USB Weld AS membrane and PVC-coated metal sheet
- Exceptional durability in all weather conditions
- Perfectly waterproof
- Perfectly suited for alpine climates with heavy snow build-up at the eaves

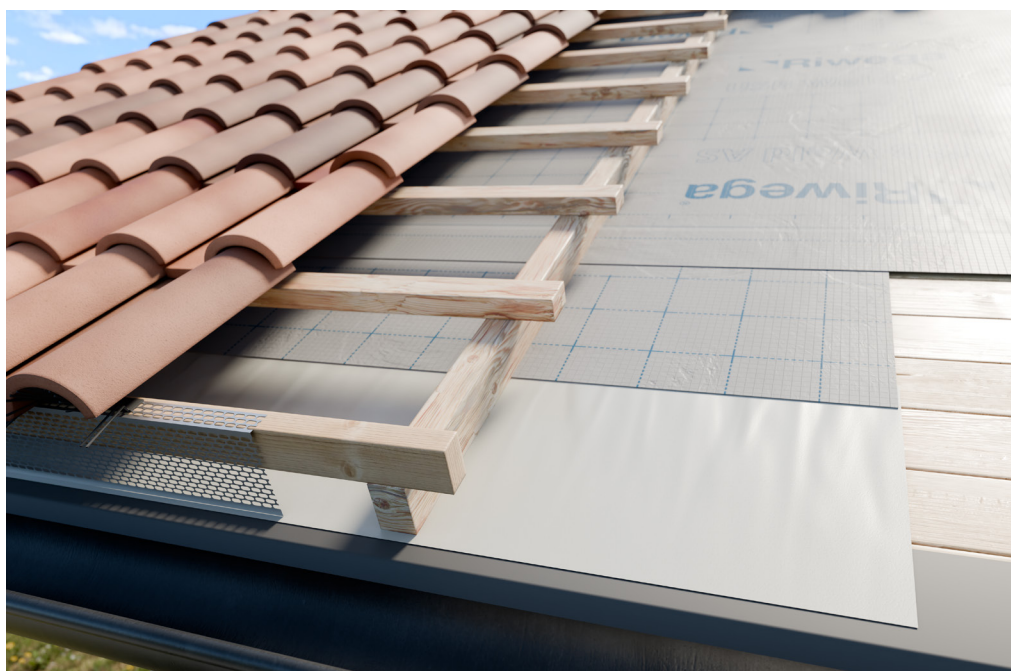

Composition:

- 1 Weldable membrane USB Weld AS
- 2 PVC-coated PET on both sides

Codes and measures

Product	Code	Width (m)	Length (m)	Pallet (m²)
USB Welding Start	02010355	0,57	15	-

Features:



Classification:



Technical data sheet - PVC

Mass per unit area	EN 1849-2	1015 g/m²
Thickness		0,5 mm
Tensile strength MD/CD*	DIN EN ISO 1421	3000 / 3000 N/50mm
Tensile strength (-25°C) MD/CD*	DIN EN ISO 1421	>2200 / >2200 N/50mm
Tear resistance MD/CD*	DIN 53 363	300 / 300 N
Adhesion (welded sample)	DIN EN ISO 2411	120 N/50mm
UV stability		stable
Temperature resistance	DIN EN 1876-1	-30°C / +70°C

Technical data sheet - USB Weld AS

Mass per unit area	EN 1849-2	345 g/m²
Thickness		0,9 mm
Resistance to water passage	EN 1928 (Met. A)	W1
Tear resistance MD/CD*	EN 12311-1	350 / 430 N/50mm
Elongation at break MD/CD*	EN 12311-1	45 / 50 %
Nail tear strength MD/CD*	EN 12310-1	280 / 250 N
Fire reaction class	EN 13501-1	E
UV stability		3 months
Temperature resistance		-40°C / +90°C

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products