


ClimaZ ROLL

R1

QUICK OVERVIEW: STRENGTHS

Practical and adaptable during installation

- Under-ridge roll
- Even more adaptable thanks to Z-shaped pleating
- Aluminum strip laminated with PE composite film for high formability and user-friendly feel
- Simplified installation
- High mechanical durability thanks to PE composite film

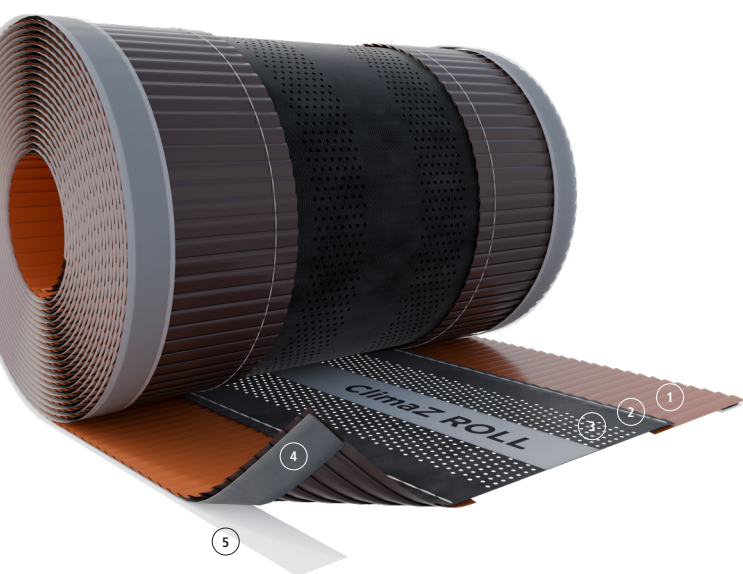

Composition:

- ① Aluminium with PE composite film
- ② Seam
- ③ PP fabric
- ④ Butylic glue
- ⑤ Silicon liner

Features:



Technical data sheet

Material		alu.PP.alu
Pre-folded edge		NO
Aluminium stripe		0,15 mm
Roll length		5,00 m
Central fabric		polypropylene
Central stripe		reinforced PP fabric
Material assembly		glue and seam
Extruded butylic glue		120 g/m
Air flow (each side)	DIN 4108-3	>120 cm²/m
UV rays stability		stable
Ageing resistance		resistant
Temperature resistance		-30°C / +70°C
Processing temperature		+5°C / +40°C
Alu development		1,50 %
Storage		dry, protected from UV rays, max. +25°C
Packaging		4 pc/box
Pallet		30 boxes

Codes and measures

Colours / Measures	310 mm	370 mm
Red-brown	01013201	01013701
Black	01013203	01013703